

BNSF Railway Safety Vision

We believe every accident or injury is preventable. Our vision is that BNSF Railway will operate free of accidents and injuries. BNSF Railway will achieve this vision through:

A culture that makes safety our highest priority and provides continuous self-examination as to the effectiveness of our safety process and performance ...

A work environment, including the resources and tools, that is safe and accident-free where all known hazards will be eliminated or safe-guarded ...

Work practices and training for all employees that make safety essential to the tasks we perform ...

An empowered work force, including all employees, that takes responsibility for personal safety, the safety of fellow employees, and the communities in which we serve.



Southwest Division

Timetable No. 4

IN EFFECT AT 0800
Mountain Continental Time
Wednesday, July 1, 2009


Division General Manager

Daryl S. Ness
Belen, New Mexico
(505) 864-4988

General Director Transportation

L.R. "Bob" Gomez
Belen, New Mexico
(505) 864-4990

BNSF Railway Company
**Southwest
Division**

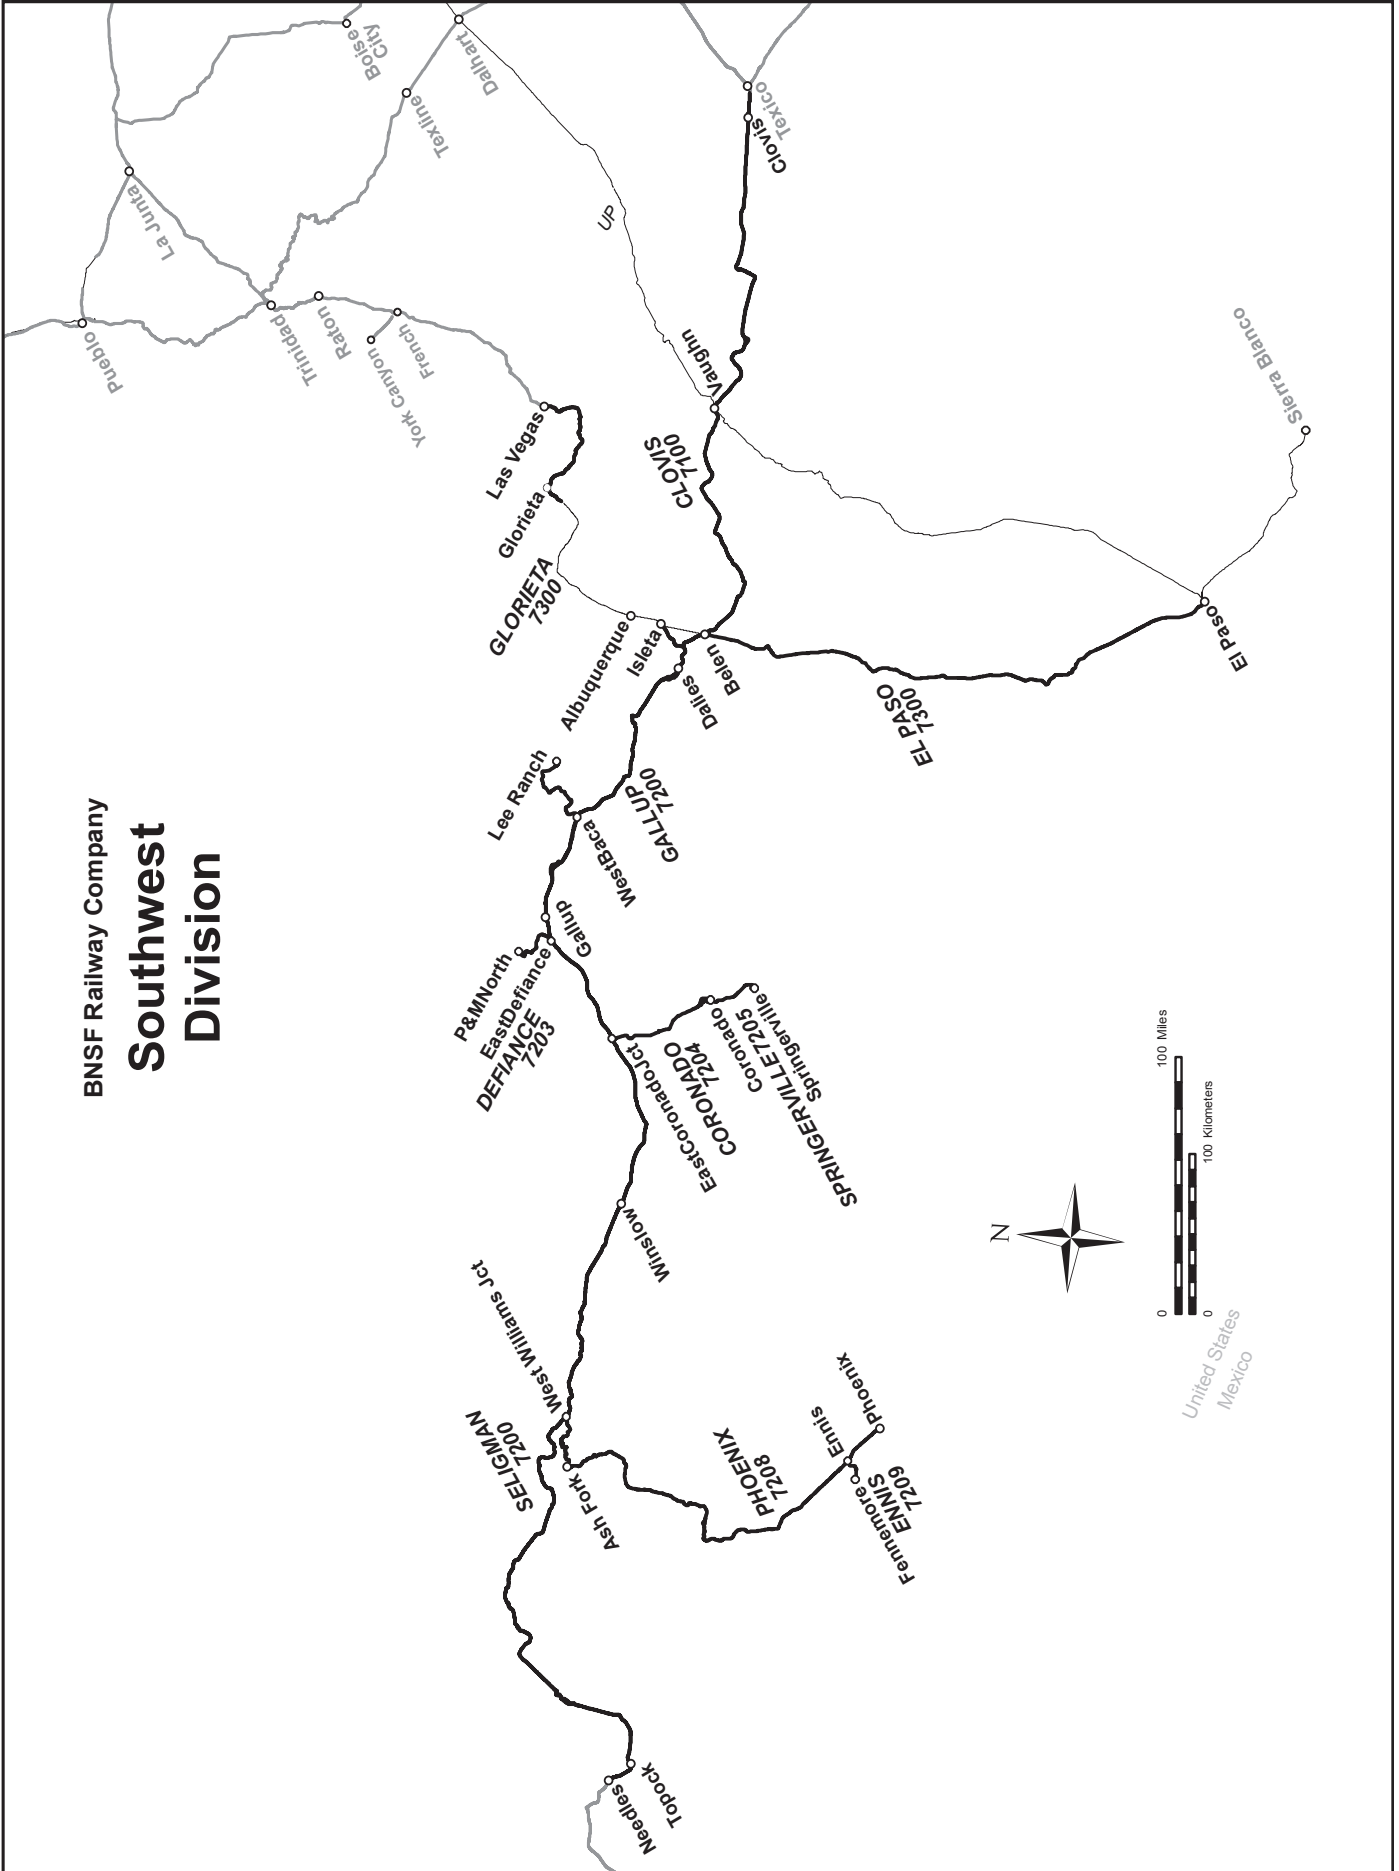

Division Managers

Albuquerque

Ray Chavez	Asst. Dir. Maint. Production	(505) 767-6846
Bill Dorcey	Manager Signals	(505) 767-6829
Denver Gilliam	Gen. Dir. Line Maintenance	(505) 767-6862
Steve Gutierrez	Trainmaster	(505) 767-6885
Kirk Hackler	Trainmaster	(505) 767-6808
Joe Hart	Trainmaster	(505) 767-6885
Lee Hostler	Manager Structures	(505) 767-6865
Greg Jacobson	Division Engineer	(505) 767-6824
Leslie Keener	Manager Roadway Planning	(505) 767-6882
Joe Norris	Supervisor Maint. Planning	(505) 767-6871
Dan Owsley	Signal Supervisor	(505) 767-6825
Paul Robinson	Signal Gen. Construction Spvr.	(505) 767-6828
Aaron Rossiter	Trainmaster	(505) 767-6885
Dave Sheperd	Manager Maint. Planning	(505) 767-6908
Russell Sweet	Signal Supervisor	(505) 767-6843
Max Tenorio	Supervisor Structures	(505) 767-6867

Belen

Luis Aguilera	Trainmaster	(505) 864-5185
Bryan Campbell	Trainmaster	(505) 864-5185
Fernando Carrera	Trainmaster	(505) 864-5185
Robert Chappell	Terminal Manager	(505) 864-5188
Brittany Coffey	Trainmaster	(505) 864-5185
Sandy Cox	Trainmaster	(505) 864-5185
Adam Dahlen	Trainmaster	(505) 864-5185
Tim Dowling	Terminal Manager	(505) 864-5188
Tyrone Fitzgerald	Superintendent Operations	(505) 864-5180
Gary Gomez	Roadmaster	(505) 864-4976
Brandon Hanzlicek	Road Foreman	(505) 864-5129
Mike Jacques	Trainmaster	(505) 864-5188
Colleen Martinez	Trainmaster	(505) 864-5185
Jason Maser	Road Foreman	(505) 864-5165
Kevin McReynolds	Supt. of Operating Practices	(505) 864-5186
Scott Meyer	Director Administration	(505) 864-4999
Dennis Mirabal	Roadmaster	(505) 864-5176
Craig Morehouse	Roadmaster	(505) 864-4918
Franco Padilla	Trainmaster	(505) 864-5185
Casey Pena	Mechanical Superintendent	(505) 864-5390
David Renteria	General Mech. Foreman	(505) 864-5162
Edmundo Rodriguez	Asst. General Foreman	(505) 864-5568
Jason Stephan	Trainmaster	(505) 864-5185
Julia Stoll	Manager of Safety	(505) 864-4954
Bill Stuhldreher	Terminal Superintendent	(505) 864-5114
Larry Tomberlin	Mgr. Police Solutions	(505) 864-5572
Ken Tracy	Trainmaster	(505) 864-5185
Brian Valencia	Trainmaster	(505) 864-5185
Joe Veale	Trainmaster	(505) 864-5185
Scott White	Trainmaster	(505) 864-5185
Kelly Williams	Trainmaster	(505) 864-5185

Clovis

Mark Bryant	Terminal Manager	(505) 742-7988
Jessie Crisp	Trainmaster	(505) 742-7985
Brandon Foster	Trainmaster	(505) 742-7985
Jason Grindy	Trainmaster	(505) 742-7985
Ken Jacobs	Trainmaster	(505) 742-7985
David Jones	General Mech. Foreman	(505) 742-7934
Victor Lopez	Roadmaster	(505) 742-7998
Lawrence Lunceford	Trainmaster	(505) 742-7985
Marie Pacheco	Trainmaster	(505) 742-7985
Paul Payne	Trainmaster	(505) 742-7985
Matt Pipkin	Signal Supervisor	(505) 742-7980
Matt Ratledge	Trainmaster	(505) 742-7985
Robert Romero	Trainmaster	(505) 742-7985
Adam Simon	Trainmaster	(505) 742-7985
Shannon Simpson	Road Foreman	(505) 742-7965

Clovis (continued)

Rick Smith	Terminal Superintendent	(505) 742-7940
Walter Sprague	Trainmaster	(505) 742-7985
Denny Sprinkle	Trainmaster	(505) 742-7985
Eddie Taylor	Trainmaster	(505) 742-7985
Cody West	Roadmaster	(505) 742-7976

El Paso

Travis Berryman	Terminal Manager	(915) 534-2373
Luis Flores	Trainmaster	(915) 534-2308
David James	Trainmaster	(915) 534-2308
Booker Munn	Roadmaster	(915) 534-2366
Mario Reyes	Mgr. Police Solutions	(915) 534-2375
Edgar Trejo	Mechanical Foreman	(915) 534-2393
Luis Torre	Trainmaster	(915) 534-2308

Flagstaff

Terry Brooks	Signal Supervisor	(928) 226-3808
Karl Jay	Roadmaster	(928) 226-3972
Dale Johnson	Division Engineer	(928) 226-3853
Pat Senf	Supervisor Structures	(928) 226-3952

Gallup

Felipe Medina Jr	Trainmaster/RFE	(505) 722-2709
Willie Miller	Trainmaster/RFE	(505) 722-2784
Adam Sorensen	Roadmaster	(505) 722-2755
Kevin Walker	Equipment Supervisor	(505) 722-2752

Holbrook

Joe Pointer	Roadmaster	(928) 289-7840
-------------	------------	----------------

Kingman

Tom Chilcoat	Signal Supervisor	(928) 718-2470
Clint Jackson	Trainmaster	(928) 718-2480
Steve Marino	Roadmaster	(928) 718-2450

Needles

Brandon Eli	Road Foreman	(760) 326-5415
-------------	--------------	----------------

Phoenix

Walter Arend	Roadmaster	(602) 382-5803
Clint Brady	Trainmaster	(602) 382-5802
Dyan Chavez	Trainmaster	(602) 382-5802
Roberto Davila	Trainmaster	(602) 382-5802
Gary Henderson	Equipment Supervisor	(602) 382-5848
Bruce McClellan	Road Foreman	(602) 382-5805
Troy McLean	Trainmaster	(602) 382-5802
Craig Smith	Trainmaster	(602) 382-5802
Paul Thomas	Superintendent Operations	(602) 382-5828

Williams

Dayne Bracken	Roadmaster	(928) 226-3812
---------------	------------	----------------

Winslow

Dale Black	Trainmaster	(928) 289-7272
Mark Blackwell	General Mech. Foreman	(928) 289-7220
David Caraway	Trainmaster	(928) 289-7722
Jennifer Fuqua	Trainmaster	(928) 289-7272
Theresa Kent	Road Foreman	(928) 289-7361
Jeff Leffler	Trainmaster	(928) 289-7272
Bob Mitchell	Trainmaster	(928) 289-7272
Carlos Perez	Superintendent Operations	(928) 289-7273
Pat Swartzfager	Road Foreman	(928) 289-7230
John Wetta	Senior Trainmaster	

Vaughn

Sean Mraz	Trainmaster	(505) 864-5330
-----------	-------------	----------------

WESTWARD ↓	Length of Siding (Feet)	Station Nos.	Mile Post	Clovis Subdivision MAIN LINE STATIONS		Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.	EASTWARD ↑
			655.7	EAST CLOVIS	X(2)			7100	1.9	
	N 9,300 S 7,300	41300	657.6	CLOVIS	BCT			2MT CTC	0.3	
			657.9	POTTER	X(2)				0.7	
			658.6	WEST CLOVIS	X				1.4	
			660.0	GALLAHER	X(2)				9.7	
			669.7	GRIER	X(2)				8.3	
	41185	678.0	MELROSE	X(2)					7.9	
	41179	685.9	CANTARA	X(2)					11.1	
	41170	697.0	TOLAR	X(2)					9.4	
	41160	706.4	LA LANDE	X(2)					9.1	
		715.5	BAILEY	X(2)					1.9	
	41155	717.4	FORT SUMNER	P					2.3	
		719.7	CP 7197				CTC		2.5	
	11,845	41153	722.2	AGUDO	X(2)				(1) 5.9 (2) 2.5	
			724.7	MCGREGOR					(2) 3.4	
	10,944	41145	728.1	RICARDO	X(2)				(1) 2.4 (2) 4.0	
			730.5	CP 7305					(1) 1.6	
			732.1	CURRY	X(2)			2MT CTC	4.9	
		41142	737.0	EVANOLA	X(2)				6.2	
		41136	743.2	YESO	X(2)				7.3	
		41130	750.5	LARGO	X(2)				(1) 6.2X (2) 5.6	
	11,171	41125	756.1	BUCHANAN					(2) 2.0	
			758.1	CP 7581	X(2)				(1) 6.9 (2) 3.3	
	11,126	41120	761.4	CARDENAS				7100	(2) 3.6	
			765.0	CP 7650	X(2)				(1) 7.8 (2) 4.0	
	11,960	41114	769.0	DUORO					(2) 3.8	
		41109	772.8	JOFFRE	X(2)				8.9	
			781.7	CP 7817	X(2)				6.8	
		40130	788.5	VAUGHN	PC				0.7	
			789.2	WEST VAUGHN					3.5	
	10,665	40122	792.7	TEJON			CTC		5.1	
		40118	797.8	CARNERO					10.0	
		40110	807.8	NEGRA	X(2)				4.7	
			812.5	CP 8125	X				(1) 3.0 (2) 5.2	
			812.6	EAST PEDERNAL					(1) 0.1	
	14,959	40106	814.1	PEDERNAL					(1) 1.5	
			815.6	WEST PEDERNAL					(1) 2.1	
		40102	817.7	DUNMOOR	X(2)				5.3	
	9,786	40098	823.0	CULEBRA	X(2)			2MT CTC	(1) 2.1 (2) 5.0	
			825.1	GAUNA					(1) 2.9	
	10,593	40094	828.0	LUCY	X(2)				(1) 2.2 (2) 6.2	
			830.2	CP 8302					(1) 4.0	
		40090	834.2	SILIO	X(2)				5.7	
		40086	839.9	WILLARD	X(2)				(1) 10.1 (2) 7.4	
			847.3	SARRETT					(2) 2.7	
	12,416	40082	850.0	BRONCHO	X(2)				(1) 3.5 (2) 4.8	
			853.5	WHITE					(1) 1.3	

WESTWARD ↓	Length of Siding (Feet)	Station Nos.	Mile Post	Clovis Subdivision MAIN LINE STATIONS		Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.	EASTWARD ↑
	6,376	40078	854.8	MOUNTAINAIR	PX(2)				7.6	
		40074	862.4	ABO	X(2)		2MT CTC		5.0	
			867.4	KAYSER	X(2)				2.9	
		40066	870.3	SCHOLLE			CTC		4.7	
		40062	875.0	EAST SAIS				7100	(1) 4.3 (2) 1.8	
			876.8	WEST SAIS					(2) 2.5	
			879.3	BEEVERS	X(2)				(1) 4.9 (2) 2.8	
	12,100	40058	882.1	BECKER			2MT CTC		(2) 2.1	
		40054	884.2	BODEGA	X(2)				4.8	
			889.0	MADRONE	X(2)				5.8	
			894.8	JARALES	X				0.8	
			895.6	EL PASO JCT.	X(2)				1.3	
		40004	896.9	BELEN	BCP RT		8 MT CTC		0.4	
			897.3	HADLEY					0.3	
			897.6	BELEN JCT.	X(2)		3MT CTC		241.9	

Tone Call-In						
RADIO COMMUNICATION	CH	DS	MC	FS	Warm Bearing	Emer
MP 660 to Cardenas	32	1	4	3	5	9
Clovis Yard RCO	82/25	-	-	-	-	
Clovis Terminal, MP 660 to MP 653	50	-	-	-	-	-
Cardenas to Beevers	72	1	4	3	5	9
Beevers to Belen Jct.	32	1	4	3	5	
Belen Road Channel	50	-	-	-	-	
Belen Yard - Primary RCO	44/84	-	-	-	-	
Belen Yard - Secondary RCO	41/81	-	-	-	-	

Train Dispatcher Telephone Numbers

Chief Dispatcher—(817) 234-2334

Dispatcher—Clovis to Cardenas on MT 2 and to CP 7650 on MT 1 (DS 29)—(817) 234-2429
 —Cardenas on MT 2 and from CP 7650 on MT 1 to Beevers (DS 07)—(817) 234-2307
 —Beevers to Belen (DS 18)—(817) 234-2318

1. Speed Regulations

1(A). Speed—Maximum

Freight

MP 655.7 to MP 897.6, including trains 100 TOB and over 55 MPH.

(EXCEPTION: 35 MPH for westward trains averaging 90 tons to 105 tons per operative brake and 25 MPH for westward trains averaging over 105 tons per operative brake between MP 856.3 and MP 879.0, Head End Only.)

Unless otherwise restricted, the maximum speed for freight trains is 70 MPH provided:

- Train does not contain empty car(s). Refer to SSI 1(C) for determining speed for multiplatform, intermodal equipment.
- Train does not exceed 8,500 feet.
Exception: Trains operating with distributed power equipment with remote DP automatic brake valve cut in may operate at 70 MPH up to 10,000 feet in length.
- Train does not average more than 80 TOB.
Exception: Trains consisting entirely of intermodal equipment, autoracks (equipment designed to carry automobiles/trucks) or a combination or both may operate at 70 MPH with tons per operative

brake as great as 90, and; Trains consisting entirely of double-stack equipment may operate at 70 MPH with tons per operative brake as great as 105.

4. Engineer can control speed to 70 MPH without use of air brakes.

(If unable to control speed to 70 MPH on long descending grades, two additional attempts are allowed to control speed with dynamic brake at slower speeds before speed must be reduced to 55 MPH while negotiating descending grade.)

Trains operating with solid double stack equipment only, may use a maximum of 32 axles of dynamic braking per engine consist.

1(B). Speed—Permanent Restrictions

	Freight
MP 655.7 to MP 658.7, Main 1 and Main 2.....	50 MPH.
MP 717.5 to MP 719.7	65 MPH.
MP 719.7 to MP 720.6, Main 2	65 MPH.
MP 726.8 to MP 727.6, Main 1 and Main 2.....	65 MPH.
MP 750.9 to MP 757.5, Main 2	65 MPH.
MP 757.2 to MP 757.5, Main 1	65 MPH.
MP 762.9 to MP 764.6, Main 1 and Main 2.....	65 MPH.
MP 769.5 to MP 771.3, Main 1 and Main 2.....	65 MPH.
MP 778.8 to MP 780.5, Main 1	60 MPH.
MP 786.6 to MP 788.6, Main 1 and Main 2.....	60 MPH.
MP 788.6 to MP 796.7	60 MPH.
MP 843.9 to MP 844.7, Main 1 and Main 2.....	65 MPH.
MP 856.3 to MP 865.8, Main 1 and Main 2.....	55 MPH.
MP 865.8 to MP 870.3, Main 1 and Main 2	45 MPH.
MP 870.3 to MP 872.8	40 MPH.
MP 872.8 to MP 875.0	50 MPH.
MP 893.1 to MP 894.6, Main 1 and Main 2.....	60 MPH.
MP 894.8 to MP 895.6, Freight Lead	25 MPH.
MP 894.8 to MP 895.6, Fuel Lead	25 MPH.
MP 894.6 to MP 895.6, Main 1 and Main 2.....	30 MPH.
MP 895.6 to MP 897.2, Main 5, 6, 7, and 8	30 MPH.
MP 897.2 to MP 897.3, Mains 5, 6, 7 and 8 (HER).....	10 MPH.
MP 897.3 to MP 897.6, Main 1, 2 and 3	30 MPH.

1(C). Speed—Switches and Turnouts

Through turnouts entering other than main tracks	10 MPH.
Through turnouts and crossovers at the following locations:	
MP 655.5, crossover Main 2 to North Lead	10 MPH.
MP 655.7, East Clovis, turnouts from Main 2 to yard.....	10 MPH.
MP 655.7, East Clovis, crossovers Main 1 to Main 2.....	40 MPH.
MP 655.9, East Clovis, turnout to North Siding	40 MPH.
MP 656.0, East Clovis, crossover Main 1 to North Siding.....	40 MPH.
MP 656.0, East Clovis, turnout to South Siding.....	30 MPH.
MP 657.6, Clovis, crossovers Main 1 to Main 2.....	40 MPH.
MP 657.6, Clovis, turnout to South Siding	30 MPH.
MP 657.6, Clovis, turnout to Main 2	10 MPH.
MP 657.9, Potter, turnout to North Siding	40 MPH.
MP 658.6, West Clovis, turnouts Main 2 to yard	10 MPH.
MP 658.6, West Clovis, crossover Main 1 to Main 2	40 MPH.
MP 660.0, Gallaher, turnout from R&D lead to R&D 1, 2 & 3	30 MPH.
MP 660.1, Gallaher crossovers.....	50 MPH.
MP 660.1, Gallaher, turnout from Main 2 to R&D track lead.....	30 MPH.
MP 660.1, to East clearance point on R&D tracks 701,702,703.....	30 MPH.
MP 669.7, Grier, crossovers	50 MPH.
MP 678.0, Melrose, crossovers	50 MPH.
MP 685.9, Cantara, crossovers	50 MPH.
MP 697.0, Tolar, crossovers	50 MPH.
MP 706.4, La Lande, crossovers	50 MPH.
MP 715.5, Bailey, crossovers	50 MPH.
MP 717.4, Fort Sumner, turnout to Main 2.....	50 MPH.
MP 719.7, CP 7197, turnout to Main 1.....	50 MPH.
MP 722.2, Agudo, crossovers	50 MPH.
MP 722.3, Agudo, turnout Main 2 to siding.....	40 MPH.
MP 724.7, McGregor, turnout Main 2 to siding	40 MPH.
MP 728.1, Ricardo, crossovers	50 MPH.
MP 728.2, Ricardo, turnout Main 1 to siding	40 MPH.
MP 730.5, CP 7305, turnout Main 1 to siding.....	40 MPH.
MP 732.1, Curry, crossovers.....	50 MPH.
MP 737.0, Evanola, crossovers	50 MPH.
MP 743.2, Yeso, crossovers	50 MPH.
MP 750.5, Largo, crossovers	50 MPH.
MP 754.4, Buchanan, turnout Main 2 to siding	40 MPH.
MP 756.7, Buchanan, turnout Main 2 to siding	40 MPH.
MP 758.1, CP 7581, crossovers	50 MPH.
MP 760.2, Cardenas, turnout Main 2 to siding.....	40 MPH.
MP 762.5, Cardenas, turnout Main 2 to siding.....	40 MPH.

	Freight
MP 765.0, CP 7650, crossovers	50 MPH.
MP 766.8, Duoro, turnout Main 2 to siding	40 MPH.
MP 769.4, Duoro, turnout Main 2 to siding	40 MPH.
MP 772.8, Joffre, crossovers	50 MPH.
MP 781.7, CP 7817, crossovers	50 MPH.
MP 788.4, Vaughn, turnout Main 1 to yard.....	10 MPH.
MP 788.5, Vaughn, turnout to Main 1.....	50 MPH.
MP 789.2, West Vaughn, turnout to tail track.....	10 MPH.
MP 791.7, Tejon, turnout to siding.....	40 MPH.
MP 793.9, Tejon, turnout to siding.....	40 MPH.
MP 797.8, Carnero, turnout to Main 2.....	50 MPH.
MP 807.8, Negra, crossovers	50 MPH.
MP 812.5, CP 8125, crossover Main 1 to Main 2.....	50 MPH.
MP 812.6, Pedernal, turnout Main 1 to siding.....	40 MPH.
MP 815.7, Pedernal, turnout Main 1 to siding.....	40 MPH.
MP 817.7, Dunmoor, crossovers.....	50 MPH.
MP 823.0, Culebra, crossovers.....	50 MPH.
MP 823.2, Culebra, turnout Main 1 to siding.....	40 MPH.
MP 825.1, CP 8251, turnout Main 1 to siding	40 MPH.
MP 828.0, Lucy, crossovers.....	50 MPH.
MP 828.0, Lucy, turnout Main 1 to siding	40 MPH.
MP 830.2, CP 8302, turnout Main 1 to siding	40 MPH.
MP 834.2, Silio, crossovers	50 MPH.
MP 839.9, Willard, crossovers	50 MPH.
MP 847.3, CP 8473, turnout Main 2 to siding	40 MPH.
MP 849.8, Broncho, turnout Main 2 to siding	40 MPH.
MP 850.0, Broncho, crossovers	50 MPH.
MP 853.5, White, turnout Main 1 to siding Mountainair	40 MPH.
MP 854.8, Mountainair, crossovers	50 MPH.
MP 854.9, Mountainair, turnout Main 1 to siding.....	40 MPH.
MP 862.4, Abo, crossovers	50 MPH.
MP 867.4, Kayser, crossovers	45 MPH.
MP 870.3, Scholle, turnout to Main 2.....	45 MPH.
MP 875.1, East Sais, turnout to Main 1	50 MPH.
MP 875.1, East Sais, turnout to siding.....	40 MPH.
MP 876.9, West Sais, turnout to siding	40 MPH.
MP 879.3, Beevers, crossovers	50 MPH.
MP 879.5, Beevers, turnout Main 2 to Becker Siding.....	40 MPH.
MP 882.1, Becker, turnout Main 2 to siding	40 MPH.
MP 884.2, Bodega, crossovers	50 MPH.
MP 889.0, Madrone, crossovers	50 MPH.
MP 894.7, Jarales, turnout to Freight Main.....	30 MPH.
MP 894.8, Jarales, crossover Main 1 to Main 2	30 MPH.
MP 894.8, turnout to Freight Lead	25 MPH.
MP 894.8, turnout to Fuel Lead	25 MPH.
MP 895.6, El Paso Jct., all switches (except entering yard).....	30 MPH.
MP 895.6, El Paso Jct., turnout Main 1 to yard.....	10 MPH.
MP 897.3, Belen Jct., turnout Main 1 to Main 5	30 MPH.
MP 897.31, Belen, turnout Main 3 to Main 4.....	30 MPH.
MP 897.36, Hadley, turnout Main 2 to Main 3.....	30 MPH.
MP 897.4, Hadley, turnout Main 1 to Main 2.....	30 MPH.
MP 897.4, Belen Jct., crossover Main 3 to Main 1.....	10 MPH.
MP 897.5, Belen Jct., crossover Main 1 to Main 3.....	30 MPH.
MP 897.6, Belen Jct., all switches (except entering yard).....	30 MPH.

1(D). Speed—Other

Clovis Terminal and Belen Terminal	
All tracks other than main tracks	10 MPH.
Controlled sidings between:	
East Clovis and Belen (unless indicated below).....	40 MPH.
Clovis South Siding	30 MPH.
Vaughn Yard (All tracks other than main tracks).....	10 MPH.
Vaughn Yard (Transfer track to UP Railroad).....	10 MPH.

Temperature Restrictions—When the air temperature meets the threshold temperature shown below, all trains must reduce speed to 40 MPH on main tracks through the limits shown unless a more restrictive speed is in effect.

Limits	Threshold Temperature
MP 856.5 to MP 870.3	90 Degrees
If in doubt as to the temperature, contact the train dispatcher.	
Notify the train dispatcher when your train is restricted to 40 MPH.	

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions**Maximum Gross Weight of Car**

East Clovis to Belen Jct.....143 tons, Restriction A

3. Type of Operation**CTC**—in effect:

MP 655.85 to MP 655.43—North Lead

MP 655.7 to MP 895.7

MP 895.7 to MP 897.7—Main Tracks 6,7, and 8

Multiple Main Tracks —in effect:**2 MT**

MP 655.7 to MP 717.4

MP 719.7 to MP 788.5

MP 797.8 to MP 870.3

MP 875.0 to MP 895.6

8 MT

MP 895.7 to MP 897.6—Main 1

MP 895.6 to MP 897.4—Main 2

MP 895.6 to MP 897.3—Main 3

MP 895.6 to MP 897.3—Main 4

MP 895.9 to MP 897.3—Main 5

MP 895.7 to MP 897.3—Main 6

MP 895.7 to MP 897.3—Main 7

MP 895.8 to MP 897.3—Main 8

Restricted Limits—in effect:

MP 895.6 to MP 897.4—Main 1

MP 895.6 to MP 897.4—Main 2

MP 895.6 to MP 897.4—Main 3

MP 895.6 to MP 897.3—Main 4

MP 895.9 to MP 897.3—Main 5

4. General Code of Operating Rules Items

Rule 6.4.2—Rule 6.4.2 does not apply from MP 655.8 to MP 655.4 on the North Lead at East Clovis.

Rule 6.17—Normal position of main track switches within restricted limits Belen will be left lined as last used.

Rule 6.19—When flagging is required, distance will be 2 miles.

Rule 6.28—Rule 6.28 is in effect at Clovis on the old Carlsbad Subdivision, MP 0.0 to MP 0.5.

At the east end of Belen Yard, between Restricted Limits and CTC Jarales will be “other than main track” with a maximum authorized speed of 25 mph on the Fuel Lead, the Freight Lead and through the crossover between the Fuel and the Freight Leads at MP 895.4 east of the fuel pads.

Rule 8.12—At signaled locations identified in the timetable/general orders as having individually controlled crossover switches (ICS), MW employees may ask the control operator for permission to operate one end of the crossover for maintenance or testing purposes only. Trains, engines, and on-track equipment must not be used or allowed within the defined working limits of the individual switch involved during such operations. The individually controlled crossover switch must be left lined and secured in the normal position prior to reporting clear of the working limits.

Rule 8.14—The 2nd paragraph is changed to read: Crossover Switches, other than individually controlled crossover switches with the control operator’s permission, must not be unlocked or lined for crossover movement when another movement is approaching or passing over either switch.

5. Trackside Warning Detectors (TWD)**A. Protecting bridges, tunnels or other structures**

MP 862.5—WWD, Recall Code 8

MP 877.8—EWD, Recall Code 7

B. Other TWD locations

MP 663.0—Exception Reporting—Recall Code 8

MP 669.7—DED, Exception Reporting

MP 675.3—DED, Exception Reporting

MP 680.1—DED, Exception Reporting

MP 684.3—Exception Reporting—Recall Code 8

MP 690.5—DED, Exception Reporting

MP 694.5—DED, Exception Reporting

MP 699.7—DED, Exception Reporting

MP 705.0—Exception Reporting—Recall Code 7

MP 711.0—DED, Exception Reporting

MP 715.5—DED, Exception Reporting

MP 719.6—DED, Exception Reporting

MP 725.5—Exception Reporting—Recall Code 8

MP 730.5—DED, Exception Reporting

MP 734.8—DED, Exception Reporting

MP 740.5—DED, Exception Reporting –

MP 746.0—Exception Reporting—Recall Code 8

MP 750.5—DED, Exception Reporting

MP 756.6—DED, Exception Reporting

MP 762.6—DED, Exception Reporting

MP 766.1—Exception Reporting—Recall Code 8

MP 771.0—DED, Exception Reporting

MP 776.2—DED, Exception Reporting

MP 781.7—DED, Exception Reporting

MP 786.4—DED, Exception Reporting

MP 791.2—Exception Reporting—Recall Code 8

MP 795.9—DED, Exception Reporting

MP 804.6—Exception Reporting—Recall Code 8

MP 810.3—DED, Exception Reporting

MP 815.7—DED, Exception Reporting

MP 820.1—DED, Exception Reporting

MP 825.1—DED, Exception Reporting

MP 832.4—Exception Reporting—Recall Code 8

MP 837.9—DED, Exception Reporting

MP 844.9—DED, Exception Reporting

MP 850.3—Exception Reporting—Recall Code 8

MP 856.1—DED, Exception Reporting

MP 862.5—EWD—Recall Code 8

MP 867.4—DED, Exception Reporting

MP 873.5—DED, Exception Reporting

MP 877.8—WWD—Recall Code 7 (Channel 32 or 50)

MP 886.6—DED, Exception Reporting

MP 890.3—Exception Reporting—Recall Code 8

C. Other detectors:

High Water—MP 779.1 Main 2

EWD signal 7794, WWD signal 7783

High Water—MP 806.9

EWD controlled signals Negra

WWD signals 8051 & 8053

High Water—MP 870.4, MP 871.2

EWD signal 8712, WWD controlled signals Scholle

Slide Fence 1—MP 870.8—Red indicators MP 870.8

WWD Control Signal Scholle

EWD Signal 8712

Slide Fence 2—MP 871.0—Red indicators MP 871.0

WWD Control Signal Scholle

EWD Signal 8712

Slide Fence 3—MP 871.5

Red indicators MP 871.5 and MP 871.6

WWD Control Signal Scholle

EWD Signal 8712

Slide Fence 4—MP 871.8—Red indicators MP 871.8

WWD Control Signal Scholle

EWD Signal 8712

Slide Fence 5—MP 872.2
 Red indicators MP 872.6 and MP 872.8
 WWD Signal 8711
 EWD Signal 8732
 Slide Fence 6—MP 872.6
 Red indicators MP 872.6 and MP 872.8
 WWD Signal 8711
 EWD Signal 8732
 High Water—MP 875.0
 EWD controlled signals East Sais
 WWD controlled signal East Sais

6. **FRA Excepted Track**—None

7. **Special Conditions**

Clovis—Remote controlled switches have been installed at three locations in the Clovis yard: The east end of tracks 701,702 and 703 at MP 658.2, the west end of tracks 3901,3902 and 3903 at MP 654.9 and at the switch on the east end of the middle to the south lead at MP 655. These are not run through switches. They must be lined either by hand using the push button on the switch or by remote control by the Clovis Trainmaster. If neither of these two methods work, follow the instructions at the switch and use the hydraulic handle.

Belen—Trains entering Main Track 3 or 4 will be issued instructions by the Trainmaster as follows: A remote power operated switch is now located at MP 897.4 on Main Track 3. The Belen Trainmaster will operate the remote controlled switch and have the train lined into the appropriate track. If the remote control operation fails, the Trainmaster will notify the train or engine crew and they will follow these instructions: If you are instructed to enter Main Track 3 or 4, stop back at least 150 feet from the switch points and operate the push button located on the switch box. This switch has switch point indicators associated with it. A green indication means the switch is lined for Main Track 3. A yellow indication means the switch is lined for Main Track 4. No light indicates the switch is out of correspondence. If there is no light, use the hand operated pump according to the instructions posted at the switch box to line the switch to the appropriate track.

Remote Control Operations—Signs located at MP 651.0 and MP 662.0, (Clovis Subdivision) and MP 0.5 (Southwest Railroad, former Carlsbad Subdivision) designate the Remote Control Area at Clovis.

Signs located at MP 888.0 (Clovis Subdivision), MP 930.0 and MP 935.0 (El Paso Subdivision), and MP 2.0 (Gallup Subdivision) designate the Remote Control Area at Belen yard.

Split Track Operations—MP 751.0 to MP 754.6, Main 1 mile posts will be designated by an X. MP 754.6X, Main 1, is the same location as MP 756.0, Main 2. The mile post sign on Main 1 at this location will indicate MP 754.6X on the top portion of the sign and MP 756.0 on the bottom portion of the sign.

Independently Controlled Switches (ICS)—

MP 660.15 MP 660.20
 MP 660.25 MP 660.30
 MP 894.81

Close Clearances—Do not ride the side of equipment at the following locations due to close clearance:

Vaughn Yard MP 788.5 All Yard Tracks
Pedernal Yard MP 814.1 All Yard Tracks
Mountainair Yard MP 854.8 All Yard Tracks

HLCS—Hy-Rail Limits Compliance System (HLCS) is in effect on the Clovis Subdivision.

Flash Flood Warnings—The following locations have been identified as “critical areas” subject to flash floods and washouts as outlined in System Special Instructions, Item 33:
 None

8. **Line Segments**

Yard Line Segments

Line Segment Limits

7155 Clovis
 7355 Belen

Road Line Segments

Line Segment Limits


7100 East Clovis to Belen Jct., MP 655.7
 to MP 897.6


9. **Locations Not Shown as Stations**

Name	Mile Post Location	Track Number	Capacity Feet	Switch Opens
Loco. Set Out (N. Siding)	656.4	0501	900	East
Peavey Grain Loop	659.1	0161	7,313	East
Gallaher (Main 2)	661.8	0711	5,520	East
Peavey Lead (Main 1)	668.0	2001	4,058	West
Set Out (Main 2)	668.0	2003	485	West
Set Out (Main 2)	680.3	2005	450	East
House Track (Main 1)	680.3	2007	2,870	East
Set Out (Main 1)	687.5	2014	475	West
Set Out (Main 2)	687.5	2015	950	West
Set Out (Main 1)	702.7	2020	550	East
Set Out (Main 2)	702.7	2021	415	East
House Track (Main 2)	709.0	2023	2,350	Both
Set Out (Main 1)	709.0	2024	550	West
Set Out (Main 2)	717.1	2027	310	West
Set Out (Siding)	722.5	2102	440	East
Set Out (Main 1)	722.6	2103	520	East
House Track (Siding)	730.2	2106	2120	Both
Set Out (Main 2)	730.2	2104	582	West
Set Out (Main 2)	743.5	2109	590	East
House Track (Main 1)	743.5	2110	1,750	Both
Set Out (Main 2)	749.5	2111	1,000	West
Set Out (Main 1)	749.5	2112	1,000	West
Set Out (Main 2)	762.6	2117	535	East
Set Out (Main 1)	762.6	2118	535	East

Name	Mile Post Location	Track Number	Capacity Feet	Switch Opens
Set Out (Main 2)	769.4	2119	635	West
Set Out (Main 1)	769.4	2120	635	West
Stock Track (Main 2)	776.2	2121	2,893	West
Set Out (Siding)	792.2	2302	440	East
Set Out (Main 1)	800.4	2303	500	East
Set Out (Main 2)	800.4	2304	450	East
Set Out (Main 1)	809.0	2306	515	West
Set Out (Main 2)	809.0	2307	515	West
Set Out (Main 1)	829.0	2316	481	East
Set Out (Main 2)	829.0	2317	380	East
Set Out (Main 1)	835.8	2318	547	West
Set Out (Main 2)	835.8	2319	477	West
Set Out (Main 1)	846.5	2402	480	East
Set Out (Main 2)	846.5	2403	450	East
Set Out (Main 1)	853.1	2407	585	West
Set Out (Main 2)	853.1	2405	487	West
House Track (Main 1)	856.1	2409	4,754	Both
Set Out (Main 2)	861.8	2416	450	West
House Track (Main 1)	868.9	2418	964	Both
Set Out (Main 1)	876.2	2420	541	East
Set Out (Siding)	876.2	2421	596	East
Set Out (Main 1)	881.1	2424	617	West
House Track (Siding)	882.0	2422	3,100	Both
Set Out (Main 2)	890.5	2427	300	East
Set Out (Solo Cup) (Main 1)	890.5	7450	3,500	East

10. Grade Charts

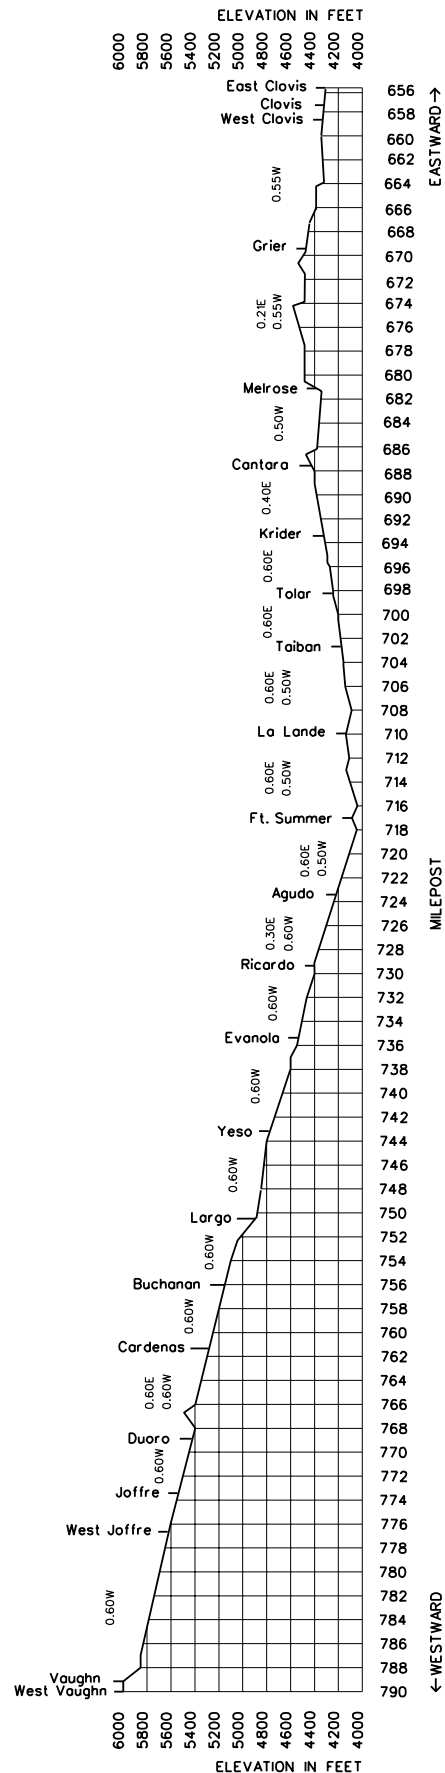

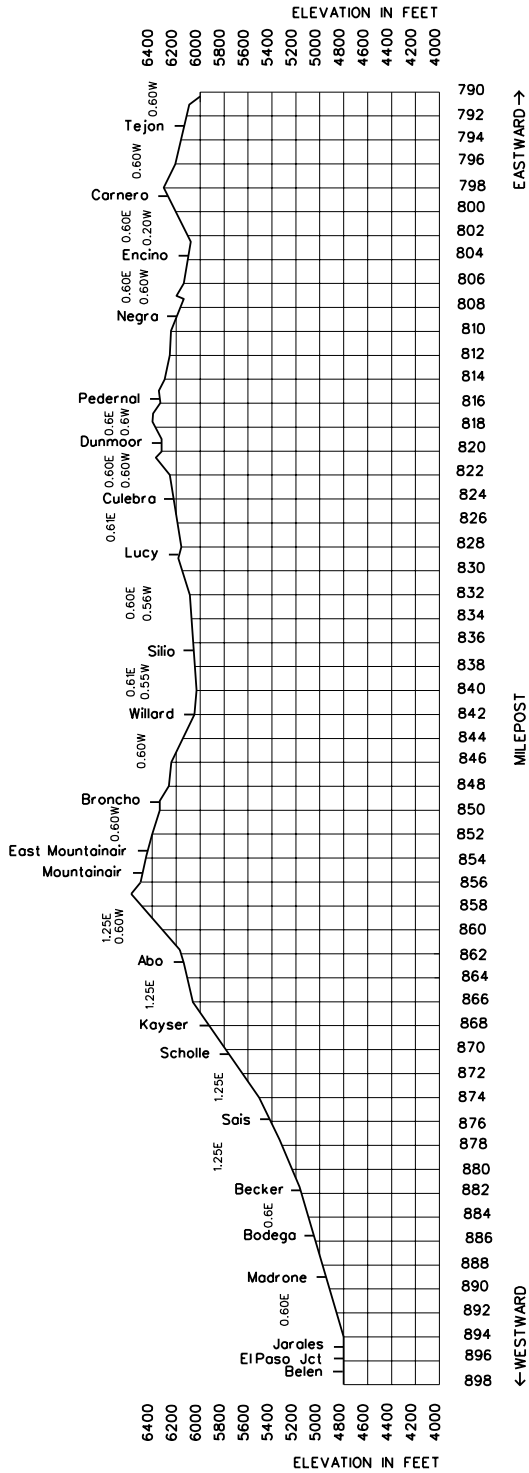

WESTWARD ↓	Length of Siding (Feet)	Station Nos.	Mile Post	Coronado Subdivn. MAIN LINE STATIONS		Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.	EASTWARD ↑
			0.0	EAST CORONADO JCT.	X		CTC	7204	0.7	
			0.7	PLATT					19.6	
		20550	20.3	SALT RIVER			TWC		19.2	
		20552	39.5	TEPCO JCT	A			5.9		
		20555	45.4	CORONADO	R			45.4		

Tone Call-In						
RADIO COMMUNICATION	CH	DS	MC	FS	Warm Bearing	Emer
East Coronado Jct. to Coronado	72	1	4	3	5	9

Train Dispatcher Telephone Numbers
Chief Dispatcher—(817) 234-2334
Dispatcher (DS 09)—(817) 234-2309

1. Speed Regulations

1(A). Speed—Maximum

	Freight
MP 0.0 to MP 0.7	30 MPH.
MP 0.7 to MP 42.5, including trains 100 TOB and over	49 MPH.
MP 42.5 to MP 44.0	15 MPH.
MP 44.0 through dumper	2 MPH.
MP 44.5 to MP 45.4	15 MPH.
West leg of wye at Platt.....	30 MPH.

1(B). Speed—Permanent Restrictions—None

1(C). Speed—Switches and Turnouts

Trains and engines using auxiliary tracks must not exceed turnout speed for that track unless otherwise indicated.

East Coronado Jct., switch to Main 2.....	40 MPH.
West Coronado Jct., switch to Main 2.....	40 MPH.
Platt, switch to East Leg of Wye.....	30 MPH.
Tepco Jct., switch to Springerville Subdivision.....	40 MPH.
Coronado, spring switch—Coronado Loop track.....	10 MPH.

1(D). Speed—Other

Locomotive cranes/pile drivers.....	25 MPH.
-------------------------------------	---------

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions
Maximum Gross Weight of Car

East Coronado Jct. to Coronado 143 tons, restriction A

3. Type of Operation

CTC—in effect:
 MP 0.0 to MP 0.7
 West leg of wye, Platt

TWC—in effect:
 MP 0.7 to MP 45.4

Restricted Limits—in effect:
 Coronado—MP 42.0 to MP 45.4

4. General Code of Operating Rules Items

Rule 6.19—When flagging is required, distance will be 1.5 miles.

5. Trackside Warning Detectors (TWD)—None

6. FRA Excepted Track—None

7. Special Conditions

Tepco Jct.—Be governed by General Manager's notice for operation of dual control switch and circuit controller box.

Close Clearances—Do not ride the side of equipment at the following locations due to close clearance:

Dumper MP 44.0.

HLCS—Hy-Rail Limits Compliance System (HLCS) is in effect on the Coronado Subdivision.

Flash Flood Warnings—The following locations have been identified as "critical areas" subject to flash floods and washouts as outlined in System Special Instructions, Item 33:
 None

8. Line Segments

Road Line Segments

Line Segment Limits


Mile Posts

7204E. Coronado Jct. to Coronado MP 0.0 to 45.4

9. Locations Not Shown as Stations

Name	Mile Post Location	Capacity Feet	Switch Opens
Salt River Storage	20.3	514	Both
Coronado Generating Station	42.6	5,882	East

10. Grade Chart

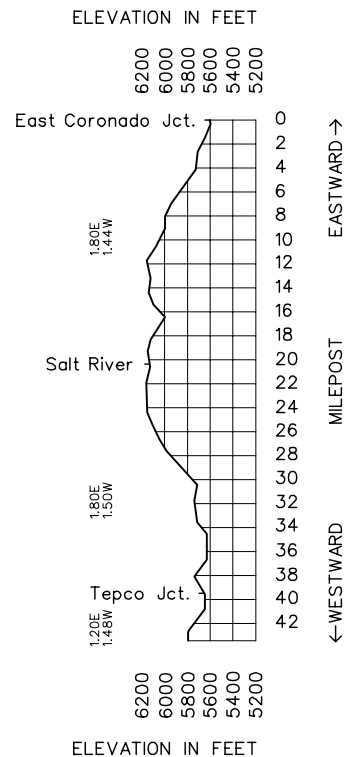

WESTWARD ↓	Length of Siding (Feet)	Station Nos.	Mile Post	Defiance Subdivision MAIN LINE STATIONS		Type of Oper.	Line Segment	Miles to Next Stn.	EASTWARD ↑
				Rule 4.3					
		20590	21.7	P&M NORTH	R		7203	8.2	
		20588	13.5	P&M SOUTH				1.0	
	6,200	20586	12.5	P&M SIDING		TWC		9.5	
		20584	3.0	CARBON JCT.	R			1.0	
	5,920	20583	2.0	MENTMORE	R			1.4	
			0.6	DEFIANCE	R			0.6	
		20595	0.0	EAST DEFIANCE		CTC		21.7	

RADIO COMMUNICATION	Tone Call-In					
	CH	DS	MC	FS	Warm Bearing	Emer
P&M North to East Defiance	36	1	4	3	5	9

Train Dispatcher Telephone Numbers
Chief Dispatcher—(817) 234-2334
Dispatcher (DS 08)—(817) 234-2308

1. Speed Regulations

1(A). Speed—Maximum

	Freight
MP 21.7 to MP 20.3	10 MPH.
MP 20.3 to MP 0.6	25 MPH.
MP 0.6 to MP 0.0	30 MPH.

1(B). Speed—Permanent Restrictions—None

1(C). Speed—Switches and Turnouts

East Defiance—switch to Main 1	30 MPH.
West Defiance—switch to Main 1	30 MPH.
Defiance—switch to east leg of wye	30 MPH.

1(D). Speed—Other

Locomotive cranes/pile drivers and Jordan spreaders.....20 MPH.

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions
Maximum Gross Weight of Car

P&M North to East Defiance 143 tons, Restriction A

Six Axle Locomotive Restrictions—Six-axle locomotives are restricted from operating on the following auxiliary tracks: 1673 and 1674.

3. Type of Operation

CTC—in effect:
 MP 0.6 to MP 0.0
 West leg of wye, Defiance.

TWC—in effect:
 MP 19.0 to MP 3.0

Restricted Limits—in effect:
 MP 21.7 to MP 19.0
 MP 3.0 to MP 0.6

4. General Code of Operating Rules Items

Rule 6.19—When flagging is required, distance will be 1.0 mile.

5. Trackside Warning Detectors (TWD)—None

6. FRA Excepted Track—None

7. Special Conditions

P&M North—Normal position for loop track switch is lined for clockwise movement.

Carbon Coal Loop—The loop track switch must be left lined for counter-clockwise movement.

Close Clearances—Do not ride the side of equipment at the following locations due to close clearance:

Defiance Spur P&M Loading Tipple, Tracks 1663 and 1670
 Navajo Forest Products Warehouse, Track 1669

HLCS—Hy-Rail Limits Compliance System (HLCS) is in effect on the Defiance Subdivision.

Flash Flood Warnings—The following locations have been identified as “critical areas” subject to flash floods and washouts as outlined in System Special Instructions, Item 33:

None

8. Line Segments

Road Line Segment


Line Segments Limits

7203 Defiance to P&M Mine

9. Locations Not Shown as Stations

Name	Mile Post Location	Capacity Feet	Switch Opens
Mentmore Storage	1.5	5,880	Both
Carbon Coal Loop	3.0	10,511	West
P&M South Mine	13.5	4,100	West

10. Grade Chart

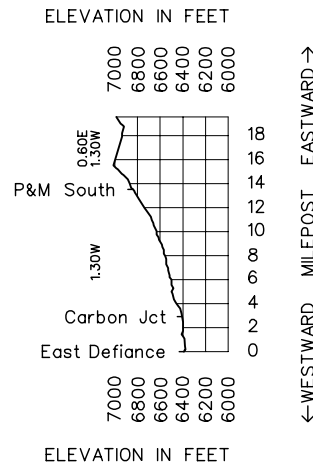

WESTWARD ↓	Length of Siding (Feet)	Station Nos.	Mile Post	El Paso Subdivision MAIN LINE STATIONS		Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.	EASTWARD ↑
Between East Isleta (BNSF) and CP Ross (NMRX) is under the jurisdiction of NMDOT (NMRX Railroad) Timetable and Special Instructions										
		40015	915.0	EAST ISLETA					0.8	
3,248		915.8	SOUTH ISLETA						7.0	
		40010	922.8	LOS LUNAS				CTC	0.9	
			923.7	CP LOS LUNAS					4.1	
		40005	927.8	CP CHLOE					4.3	
			932.1	CP ROSS					4.7	
			932.4	BELEN JCT.	RX(2)				0.7	
		40004	933.1	BELEN	BCPRT		8 MT CTC		1.3	
			934.4	EL PASO JCT.	X(2)				8.1	
		29785	942.5	SABINAL					11.0	
7,790	29780	953.5	LA JOYA					TWC	24.3	
4,147	29765	977.8	SOCORRO	PT					10.4	
		29760	988.2	SAN ANTONIO					16.9	
6,004	29745	1005.1	SAN MARCIAL						7.2	
		29740	1012.3	POPE				7300	9.1	
		29735	1021.4	LAVA					21.7	
		29725	1043.1	EAST ENGEL					1.8	
			1044.9	WEST ENGEL			DT TWC		28.8	
		29705	1073.7	GRAMA					5.9	
		29700	1079.6	RINCON	PT				7.7	
7,590	29660	1087.3	TONUCO					TWC	8.4	
		29645	1095.7	MEDLER					5.4	
		29630	1101.1	LEASBURG					11.4	
		29600	1112.5	LAS CRUCES					2.5	
		29590	1115.0	MESILLA PARK					8.9	
8,393	29580	1123.9	MESQUITE, NM						15.9	
		29540	1139.8	VINTON, TX					2.6	
		29530	1142.4	CANUTILLO					12.7	
		29500	1155.1	EL PASO	BCPRT				240.1	

	Tone Call-In					
	CH	DS	MC	FS	Warm Bearing	Emer
RADIO COMMUNICATION						
Isleta to Belen Jct.	32	1	4	3	5	9
Belen Jct. to El Paso Jct.	50	-	-	-	-	
El Paso Jct. to MP 1069	30	1	4	3	5	9
MP 1069 to El Paso	36	1	4	3	5	9
El Paso Yard	54	-	-	-	-	
El Paso Yard RCO	94/16	-	-	-	-	

Train Dispatcher Telephone Numbers
Chief Dispatcher—(817) 234-2334
Dispatcher (DS 18)—(817) 234-2318
Dispatcher (DS 13)—(817) 234-2313

1. Speed Regulations

1(A). Speed—Maximum

	Passenger	Freight
MP 915.0 to MP 932.4	79 mph	55 MPH.
MP 934.4 to MP 1155.1, including trains over 100 TOB		49 MPH.

1(B). Speed—Permanent Restrictions

	Freight
MP 957.9 to MP 966.3	30 MPH.
MP 973.1 to MP 973.5	45 MPH.
MP 985.3 to MP 986.3	40 MPH.
MP 987.5 to MP 987.7	30 MPH.
MP 1006.2 to MP 1022.2	40 MPH.
MP 1022.9 to MP 1023.1	30 MPH.
MP 1036.4 to MP 1037.0	45 MPH.
MP 1075.8 to MP 1079.1	30 MPH.
MP 1079.4 to MP 1079.8	20 MPH.
MP 1079.9 to MP 1080.4	40 MPH.
MP 1082.8 to MP 1086.0	40 MPH.
MP 1088.4 to MP 1088.6	45 MPH.
MP 1090.1 to MP 1092.9	20 MPH.
MP 1093.3 to MP 1094.7	30 MPH.
MP 1096.0 to MP 1101.6	45 MPH.
MP 1111.5 to MP 1114.4 (HER)	30 MPH.
MP 1147.5 to MP 1151.9 (HER)	30 MPH.
MP 1151.9 to MP 1153.8	25 MPH.

1(C). Speed—Switches and Turnouts

Trains and engines using auxiliary tracks must not exceed turnout speed for that track unless otherwise indicated.

MP 915.0, Isleta, turnout to El Paso Subdivision	40 MPH.
MP 932.1, CP Ross, turnout to station Belen	40 MPH.
MP 932.4, Belen Jct., all switches (except entering yard)	30 MPH.
MP 934.4, El Paso Jct., turnout to El Paso Subdivision	30 MPH.
MP 1043.1, Engel, turnout from Main 1	40 MPH.
MP 1044.9, Engel, turnout from Main 2	40 MPH.
MP 1079.6, turnout to El Paso Sub	10 MPH.

1(D). Speed—Other

All Sidings 10 MPH.

At El Paso, trains or engines must approach levee track crossing, located approximately 195 feet south of the headblock of BNSF track to the International Bridge and 387 feet north of the center of bridge, prepared to stop. If crossing clear and no conflicting movement evident, movement over crossing may be made without stopping, at speed not exceeding 10 MPH.

Temperature Restrictions—When air temperature meets and/or exceeds “threshold temperature” of 100 degrees, trains must not exceed 30 MPH on main tracks between 1400 hours and 2000 hours, unless the train dispatcher authorizes a higher speed. The train dispatcher must not authorize a higher speed unless advised by the track supervisor who makes an inspection after 1400 hours, to raise speed.

If in doubt as to the temperature, contact the train dispatcher. Notify the train dispatcher when your train is restricted.

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions

Maximum Gross Weight of Car

East Isleta to El Paso 143 tons, Restriction A

Multiple-car movements for cars heavier than 143 tons are permitted between Rincon and El Paso.

Six-axle locomotives are not permitted on the following auxiliary tracks:

- Chloe—4009, 4010
- Los Lunas—4007

3. Type of Operation

CTC—in effect:

MP 932.1 to MP 934.4

Multiple Main Tracks—in effect:

8 MT:

MP 932.4 to MP 934.4

TWC—in effect:
MP 934.4 to MP 1152.8

Double Track—in effect:
MP 1043.1 to MP 1044.9
The normal position of the switches is lined for left-hand movement.

Restricted Limits—in effect:
MP 934.4 to MP 935.2
MP 1152.8 to MP 1154.5

4. General Code of Operating Rules Items

Rule 1.14—Southwestern RR trains use BNSF tracks between MP 1082.7 and MP 1079.6, governed by BNSF Timetable and Special Instructions. Rule 6.28 in effect. BNSF trains may use NMRX Joint Track between East Isleta and CP Ross. BNSF Special Instructions will apply unless modified by NMRX.

Rule 6.19—When flagging is required, distance will be 1.5 miles.

Rule 6.24—In double track at East and West Engel, trains will keep to the left when operating with the current of traffic.

Rule 6.28—Rule 6.28 is in effect on the lead at El Paso, MP 1154.5 to MP 1155.1.

5. Trackside Warning Detectors (TWD)

- A. Protecting bridges, tunnels or other structures: None
- B. Other TWD locations
 - MP 969.1—Recall Code 8
 - MP 989.0—Recall Code 7
 - MP 1010.6—Recall Code 8
 - MP 1040.9—Recall Code 8
 - MP 1071.1—Recall Code 8
 - MP 1082.4—Recall Code 7
 - MP 1097.2—Recall Code 8
 - MP 1121.7—Recall Code 8
 - MP 1146.7—Recall Code 8
- C. Other detectors:
 - High Water—MP 943.3***
Signs MP 941.6, 945.0
 - High Water—MP 965.8, 966.1
Signs MP 964.8, MP 967.1
 - High Water*—MP 979.4, MP 980.1, MP 981.3, MP 982.9,
MP 983.2, MP 983.5, MP 984.6, MP 985.1,
MP 985.2, MP 986.5, MP 986.9, MP 987.1,
MP 987.4
EWD—MP 988.8, WWD—MP 978.04**
 - High Water*—MP 1050.1, MP 1050.9, MP 1051.3
MP 1052.6, MP 1053.3, MP 1053.7, MP 1054.3,
MP 1055.7
EWD—MP 1057.1, WWD—MP 1048.7**
 - High Water*—MP 1065.2, MP 1066.3 MP 1069.7,
MP 1071.6
EWD—MP 1072.9, WWD—MP 1063.8**
 - High Water*—MP 1081.9, MP 1082.5, MP 1082.7,
MP 1083.0, MP 1083.7, MP 1085.5
EWD—MP 1087.9 & MP 1086.6, WWD—MP 1080.9**
 - High Water*—MP 1088.4, MP 1088.7, MP 1089.2,
MP 1090.2, MP 1090.9, MP 1091.5, MP 1093.0,
MP 1093.2, MP 1093.8, MP 1094.4
EWD—MP 1096.2, WWD—MP 1086.6 & MP 1087.9**

*Each high water bridge has been equipped with a white light which, if actuated, will be flashing or "dark". Trains must stop and inspect only those bridges which have been actuated. Trains must operate according to Rule 9.1.25 in the remainder of the HWD area .

**Special Aspect Indicators as shown in System Special Instructions, Rule 9.1.25 and 9.1.26

***A radio type detector which will notify trains via radio if it is safe to proceed [SSI item 8(l)].

6. FRA Excepted Track—None

7. Special Conditions

Belen—Between El Paso Jct. and Belen Jct., trains will be governed by Clovis Subdivision Timetable and Special Instructions.

Remote Control Operations—Signs located at MP 888.0 (Clovis Subdivision), MP 930.0 and MP 935.0 (El Paso Subdivision) and MP 2.0 (Gallup Subdivision) designate the Remote Control area at Belen.

The sign located at MP 1150.0 (El Paso Subdivision) designates the Remote Control Area at El Paso. This includes all BNSF Trackage west of MP 1150.0.

Remote Control Zone—Signs located at MP 1154.5 and MP 1155.3 designate the Remote Control Zone (RCZ) on the 199 switch lead and on track 300 on the East end of El Paso Yard.

The Remote Control foreman will notify the Trainmaster or the Assistant Trainmaster when the Remote Control Zone is activated or deactivated. Movements desiring to enter the RCZ must contact the Remote Control foreman on channel 94/16 to determine if the RCZ is activated. If unable to contact the Remote Control foreman, contact the Trainmaster or Assistant Trainmaster to determine if the RCZ is activated.

Spring Switches, Location by Station

MP 1043.1 and MP 1044.9, Engel
MP 1123.7 and MP 1125.4, Mesquite

Close Clearances—Do not ride the side of equipment at the following locations due to close clearance:

Tonuco	MP 1087.8	Track 4321	Unloading dock
Dona Ana	MP 1107	Track 4405	Unloading dock
Las Cruces	MP 1112.5	Track 4505	Building
	MP 1112.8	Track 4502	Unloading dock
Mesquite	MP 1124	Track 4533	Building
Vado	MP 1128	Track 4536	Fence
Berino	MP 1131.4	Track 4541	Unloading dock
Anthony	MP 1136.7	Track 4602	Building
	MP 1137	Track 4609	Fence
	MP 1137.3	Track 4606	Fence
	MP 1137.3	Track 4607	Unloading building
Canutillo	MP 1142.3	Track 730	Fence
Montoya	MP 1145.5	Track 702	Between ML switch and Montoya road, fence
El Paso	MP 1148.0	Track 502	Within Sugar Plant
	MP 1150.3	Track 436	Mondel unloading track, building
	MP 1151.5	Track 415	East end of track account pipes
	MP 1152.5	Track 402	Within Cemex Plant
	MP 1155.6	Track 204	Fence
	MP 1156	Track 151	Loading dock

Close Track Centers—Do not ride the side of equipment on the following tracks unless the adjacent track is know to be clear:

El Paso 101, 102, 104 thru 107, 122, 151, 152, 199 and 240

Flash Flood Warnings—The following locations have been identified as “critical areas” subject to flash floods and washouts as outlined in System Special Instructions, Item 33:
MP 943.23 to MP 943.4


- 8. Line Segments**
Yard Line Segments
Line Segment Yard
 7356 El Paso

Road Line Segments
Line Segment Mile Posts
 7300 MP 934.4 to MP 1155.1

9. Locations Not Shown as Stations

Name	Mile Post Location	Capacity Feet	Switch Opens
Isleta	915.0	3546	Both
Los Lunas	922.4	4136	Both
Desert Green	935.3	373	West
San Acacia	963.5	4102	Both
San Antonio	988.2	5000	Both
Elmendorf	999.0	4132	Both
Tiffany Stock Yards	1002.1	1112	West
Pope	1012.0	2650	Both
Lava	1021.0	2650	East
Crocker	1031.5	4044	Both
Aleman	1056.4	350	West
Alivio	1067.1	4150	Both
Dona Ana	1106.9	3132	Both
Hanes Knitting Mill	1118.2	580	West
Santo Tomas	1123.5	770	Both
Vado	1127.8	2687	Both
Berino	1131.4	1385	Both
Anthony	1136.4	2509	Both
Mountain Pass Canning Co.	1137.5	815	West
W. Silver Co.	1138.3	3625	West
Border Steel Co.	1138.9	3647	West
Bergen Steel Co.	1141.1	1671	East
Montoya	1145.3	3224	Both

10. Grade Charts

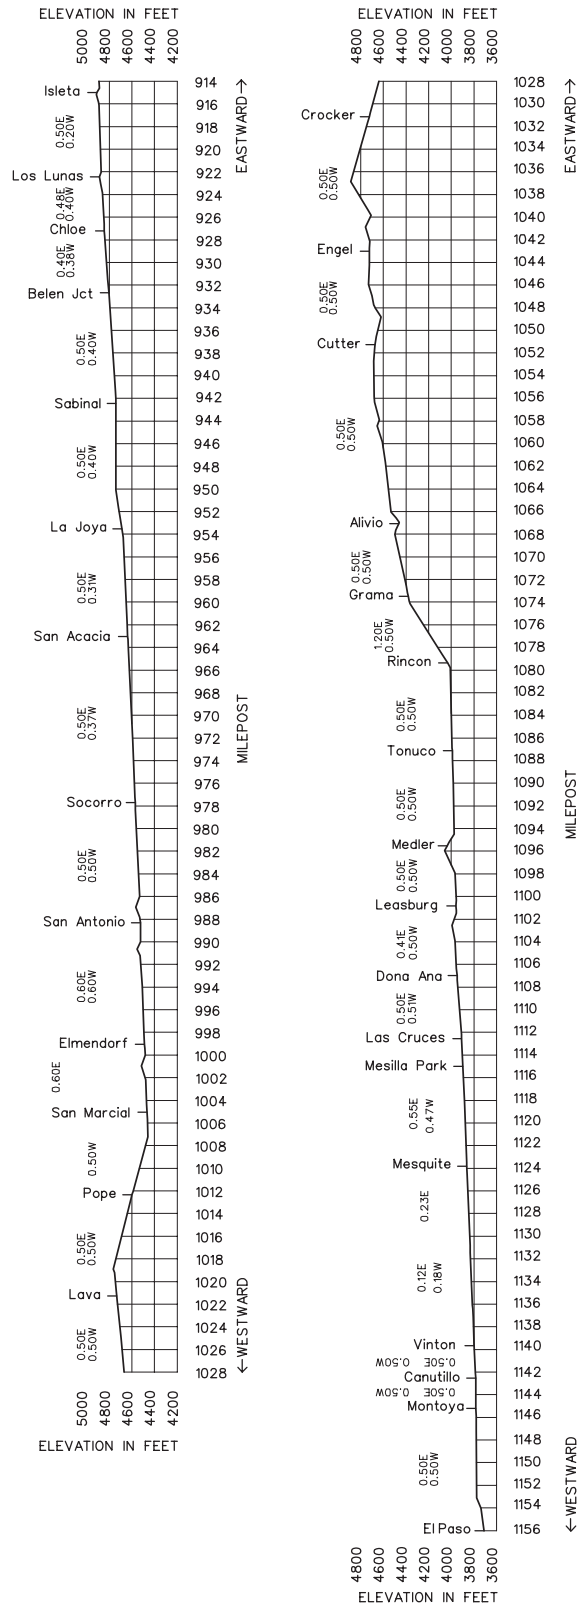

WESTWARD ↓	Length of Siding (Feet)	Station Nos.	Mile Post	Ennis Subdivision MAIN LINE STATIONS			Rule 4.3	Type of Oper.	Line Segment	Miles to Next Str.	EASTWARD ↑
		19578	0.0	ENNIS		R				1.1	
		19594	1.1	GOLDBADGE		R				2.3	
			3.4	SUN VALLEY		R				1.9	
		19602	5.3	WEBB SPUR		R		7209		2.3	
		19608	7.6	WAYNE		R				1.4	
		19616	9.0	FENNEMORE		R				9.0	

Tone Call-In						
RADIO COMMUNICATION	CH	DS	MC	FS	Warm Bearing	Emer
Ennis to Fennemore	36	1	4	3	5	9

Train Dispatcher Telephone Numbers

Chief Dispatcher—(817) 234-2334

Dispatcher (DS 13)—(817) 234-2313

1. Speed Regulations

1(A). Speed—Maximum

MP 0.0 to MP 9.0 **Freight** 10 MPH.

1(B). Speed—Permanent Restrictions—None

1(C). Speed—Switches and Turnouts—None

1(D). Speed—Other—None

2. Bridge and Equipment Weight Restrictions

Maximum Gross Weight of Car

Ennis to Fennemore 143 tons, Restriction D
Six-axle locomotives are not allowed on the Ennis Subdivision.

3. Type of Operation

Restricted Limits—in effect:

MP 0.0 to MP 9.0.....Ennis to Fennemore

4. General Code of Operating Rules Items

Rule 6.19—When flagging is required, distance will be 1.0 miles.

5. Trackside Warning Detectors (TWD)—None

6. FRA Excepted Track—None

7. Special Conditions

Flash Flood Warnings—The following locations have been identified as “critical areas” subject to flash floods and washouts as outlined in System Special Instructions, Item 33:
None

8. Line Segments

Road Line Segments


Line Segment Limits

7209 Ennis to Fennemore

9. Locations Not Shown as Stations

Name	Mile Post Location	Capacity Feet	Switch Opens
Bumstead	4.3	1,050	Both
Calgas	6.0	1,328	Both
Reams	6.5	3,220	Both

10. Grade Chart



WESTWARD ↓	Length of Siding (Feet)	Station Nos.	Mile Post	Gallup Subdivision MAIN LINE STATIONS		Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.	EASTWARD ↑
			0.0	BELEN JCT.	BCT X(2)		3 MT CTC		0.6	
			0.6	ARAGON	X				4.9	
			5.5	FELIPE	X(2)			4.6		
		20870	10.1 27.4	DALIES	X(2)			6.5		
		20862	33.9	RIO PUERCO	X(2)			MT1 13.3 MT2 14.1		
		20840	47.2	SUWANEE	X(2)			11.5		
		20830	58.7	MARMON	X(2)			12.4		
		20810	71.1	LAGUNA	X(2)			11.6		
		20784	82.7	McCARTYS	X(2)			11.6		
		20770	94.3	EAST GRANTS	X			4.0		
			98.3	WEST GRANTS	X			15.0		
		20720	113.3	EAST BACA	TX			1.5		
			114.8	WEST BACA	TX			MT1 2.9 MT2 10.8		
		20705	117.7	EAST PEGS (Main 1)	T			0.8		
			118.5	WEST PEGS (Main 1)	T			7.1		
		20690	125.6	THOREAU	T			3.2		
		20680	128.8	GONZALES	X(2)			MT1 15.8 MT2 14.2		
		20640	143.0	PEREA	X(2)			8.6		
(1) 8,534		20610	151.6	ZUNI				4.9		
			156.5	EAST GALLUP	X(2)			1.1		
		20600	157.6	GALLUP	BPT			3.7		
			161.3	WEST GALLUP	X(2)		2MT CTC ATS	3.7		
		20595	165.0	EAST DEFIANCE	X		7200	2.0		
			167.0	WEST DEFIANCE	TX			9.1		
		20580	176.1	LUPTON	X(2)			13.9		
(2) 6,280			190.0	EAST HOUCK	X			2.6		
			192.6	WEST HOUCK	X			9.6		
		20570	202.2	CHETO	X(2)			12.6		
			214.8	EAST CORONADO JCT.	TX			1.1		
			215.9	WEST CORONADO JCT.	TX			3.3		
		20540	219.2	PINTA				3.6		
			222.8	BIBO	X(2)			9.2		
(1) 14,092			232.0	EAST ADAMANA	X			3.0		
			235.0	WEST ADAMANA	X			8.5		
			243.5	ARNTZ	X(2)			9.8		
(1) 5,460			253.3	EAST HOLBROOK	X			2.2		
			255.5	WEST HOLBROOK	X			3.1		
		20515	258.6	PENZANCE				MT1 1.0 MT2 3.8		
			259.6	CHOLLA (Main 1)				2.8		
		20510	262.4	JOSEPH CITY				3.0		
			265.4	MANILA	X(2)			7.6		
(1) 6,800			273.0	EAST HIBBARD	X			2.4		
			275.4	WEST HIBBARD	X			9.1		
		20500	284.5	EAST WINSLOW	BCT X(2)			MT1 268.8 MT2 268.0		

Train Dispatcher Telephone Numbers
Chief Dispatcher—(817) 234-2334
Dispatcher—Belen to Rio Puerco (DS 18)—(817) 234-2318
Dispatcher—Rio Puerco to Lupton (DS 08)—(817) 234-2308
Dispatcher—Lupton to Winslow (DS 09)—(817) 234-2309

RADIO COMMUNICATION	Tone Call-In					
	CH	DS	MC	FS	Warm Bearing	Emer
Belen Road Channel	50	-	-	-	-	-
Belen Yard - West Leads (Tracks 7103 - 7111)	41/81	-	-	-	-	-
Belen Yard - East Leads (Tracks 7112 - 7121)	44/84	-	-	-	-	-
Belen to Rio Puerco	32	1	4	3	5	9
Rio Puerco to Lupton	36	1	4	3	5	9
Lupton to East Winslow	72	1	4	3	5	9
Gallup Yard RCO	64/24	1	4	3	5	9
Gallup Yard	84	-	-	-	-	-

1. Speed Regulations

1(A). Speed—Maximum

	Passenger	Freight
Includes trains 100 TOB and over		
MP 0.0 to MP 10.1.....		55 MPH*
MP 27.4 to MP 58.7.....	90 MPH.....	55 MPH*
MP 58.7 to MP 128.8, Main 2.....	79 MPH.....	55 MPH*
MP 58.7 to MP 85.9, Main 1.....	79 MPH.....	55 MPH*
MP 85.9 to MP 128.8, Main 1, WWD.....	79 MPH.....	55 MPH*
MP 85.9 to MP 128.8, Main 1, EWD.....	90 MPH.....	55 MPH*
MP 128.8 to 157.6, Main 2, WWD.....	90 MPH.....	55 MPH*
MP 128.8 to MP 157.6, Main 2, EWD.....	79 MPH.....	55 MPH*
MP 128.8 to MP 157.6, Main 1.....	79 MPH.....	55 MPH*
MP 157.6 to MP 284.5.....	90 MPH.....	55 MPH*

Pegs Spur

Both legs of wye—MP 0.0 to 0.8.....	40 MPH.
MP 0.8 to MP 2.6.....	20 MPH.
MP 2.6 to MP 4.3.....	15 MPH.
Dumper to MP 3.9.....	4 MPH.

Freight trains on descending grades with dynamic brakes not in use, WWD

MP 130.4 to MP 135.5, Main 2.....	30 MPH.
-----------------------------------	---------

EWD

MP 10.0 to MP 0.2.....	30 MPH.
------------------------	---------

* Unless otherwise restricted, an asterisk (*) in the freight column indicates the maximum speed for freight trains is 70 MPH provided:

- Train does not contain empty car(s). Refer to SSI 1(C) for determining speed for multiplatform, intermodal equipment.
- Train does not exceed 8,500 feet.
Exception: Trains operating with distributed power equipment with remote DP automatic brake valve cut in may operate at 70 MPH up to 10,000 feet in length.
- Train does not average more than 80 TOB.
Exception: Trains consisting entirely of intermodal equipment, autoracks (equipment designed to carry automobiles/trucks) or a combination or both may operate at 70 MPH with tons per operative brake as great as 90, and; Trains consisting entirely of double-stack equipment may operate at 70 MPH with tons per operative brake a great as 105.
- Engineer can control speed to 70 MPH without use of air brakes.

(If unable to control speed to 70 MPH on long descending grades, two additional attempts are allowed to control speed with dynamic brake at slower speeds before speed must be reduced to 55 MPH while negotiating descending grade.)

Trains operating with solid double stack equipment only, may use a maximum of 32 axles of dynamic braking per engine consist.

1(B). Speed—Permanent Restrictions

	Passenger	Freight
MP 0.0 to MP 0.5.....		30 MPH.
MP 6.7 to MP 10.2.....		65 MPH.
MP 10.2 to MP 27.5A.....	65 MPH.....	65MPH.
MP 27.5A to MP 32.4, Main 1.....	70 MPH.....	65 MPH.
MP 27.5A to MP 32.5, Main 2.....	70 MPH.....	65 MPH.
MP 38.6 to MP 39.1, Main 1.....	85 MPH.	
MP 36.8 to MP 45.0X, Main 2.....	70 MPH.....	65 MPH.
MP 59.1 to MP 60.1.....	65 MPH.....	60 MPH.
MP 60.1 to MP 61.2.....	55 MPH.....	50 MPH.
MP 61.2 to MP 62.9 ** *.....	50 MPH.....	45 MPH.

	Passenger	Freight
MP 62.9 to MP 66.0	70 MPH	65 MPH.
MP 66.0 to MP 66.7	60 MPH	55 MPH.
MP 66.7 to MP 67.8	70 MPH	65 MPH.
MP 83.9 to MP 88.0	60 MPH	55 MPH.
MP 88.0 to MP 91.0	70 MPH	65 MPH.
MP 101.8 to MP 102.3, Main 1 EWD only	85 MPH.	
MP 105.0 to MP 109.7, Main 1 EWD only	80 MPH.	
MP 127.5 to MP 127.8, Main 1 EWD only	80 MPH.	
MP 129.9X to MP 130.7X, Main 1	60 MPH	55 MPH.
MP 129.4 to MP 130.2, Main 2 WWD only	80 MPH.	
MP 133.4X to MP 136.4X, Main 1	60 MPH	55 MPH.
MP 149.7 to MP 150.1, Main 2 WWD only	80 MPH.	
MP 154.6 to MP 156.8, Main 2 WWD only	85 MPH.	
MP 156.8 to MP 157.6	65 MPH	50 MPH.
MP 157.6 to MP 157.9 (HER)	30 MPH.	
MP 157.6 to MP 158.3	45 MPH	30 MPH.
MP 160.7 to MP 160.9	80 MPH.	
MP 166.4 to MP 166.7	85 MPH.	
MP 188.4 to MP 188.9	80 MPH.	
MP 213.2 to MP 219.2	80 MPH.	
MP 228.0 to MP 228.3	85 MPH.	
MP 249.5 to MP 252.1	80 MPH.	
MP 253.1 (HER)	70 MPH.	
MP 264.2 to MP 264.4	80 MPH.	
MP 284.6 to MP 285.5	65 MPH	55 MPH.

* Equipped with Westward ATS Inert Inductors

** Equipped with Eastward ATS Inert Inductors

1(C). Speed—Switches and Turnouts

Trains and engines using auxiliary tracks must not exceed turnout speed for that track unless otherwise indicated.

MP 0.6, Turnout Main 1 to Main 1	30 MPH.
MP 0.6, Crossover Main 1 to Main 2	50 MPH.
Felipe, two crossovers	50 MPH.
MP 27.4, Dalies	40 MPH.
MP 27.5, Crossover	40 MPH.
MP 27.6, Crossover	50 MPH.
MP 33.9, Rio Puerco, two crossovers	50 MPH.
MP 47.2, Suwanee, two crossovers	50 MPH.
MP 58.7, Marmon, two crossovers	50 MPH.
MP 71.1, Laguna, two crossovers	50 MPH.
MP 82.7, McCartys, two crossovers	50 MPH.
MP 94.3, East Grants, crossover	50 MPH.
MP 98.3, West Grants, crossover	50 MPH.
MP 113.3, East Baca, crossover	50 MPH.
MP 113.4, Switch to east leg of wye	40 MPH.
MP 114.7, West Baca, switch to west leg of wye	40 MPH.
MP 114.8, Crossover	50 MPH.
MP 117.7, East Pegs, switch to east leg of wye	40 MPH.
MP 118.5, West Pegs, switch to west leg of wye	40 MPH.
Pegs, stem of wye	40 MPH.
MP 128.9, Gonzales, two crossovers	50 MPH.
MP 142.9, Perea, two crossovers	50 MPH.
MP 156.4, East Gallup, crossover	40 MPH.
MP 156.5, Crossover	50 MPH.
MP 156.6, EE Freight Lead	20 MPH.
MP 161.3, West Gallup, two crossovers	50 MPH.
MP 161.2, WE freight lead	20 MPH.
MP 165.1, East Defiance, crossover	50 MPH.
MP 165.3, East leg of wye	30 MPH.
MP 165.4, EE Storage No. 1, electric switch lock	30 MPH.
MP 165.9, WE Storage No. 1, electric switch lock	30 MPH.
MP 166.9, West Defiance, west leg of wye	30 MPH.
MP 167.0, Crossover	50 MPH.
MP 176.07, Lupton, 2 dual control crossovers	50 MPH.
MP 190.0, East Houck, crossover	50 MPH.
MP 192.0, West Houck, switch to South Siding	40 MPH.
MP 192.1, West Houck, crossover	50 MPH.
MP 202.24, Cheto, 2 dual control crossovers	50 MPH.
MP 214.8, East Coronado Jct., crossover	50 MPH.
MP 214.8, Switch to east leg of wye	40 MPH.
MP 215.8, West Coronado Jct., switch to west leg of wye	40 MPH.
MP 215.8, Crossover	50 MPH.
MP 222.78, Bibo, 2 dual control crossovers	50 MPH.
MP 231.83, East Adamana, dual control crossover	50 MPH.
MP 231.83, dual control switch to N siding	40 MPH.
MP 235.05, West Adamana, dual control crossover	50 MPH.
West Adamana, dual control switch to North Siding	40 MPH.
MP 243.55, Arntz, 2 dual control crossovers	50 MPH.

	Freight
MP 253.2, East Holbrook, dual control crossover	50 MPH.
East Holbrook, dual control switch to North Siding	40 MPH.
MP 255.6, West Holbrook, dual control crossover	50 MPH.
MP 259.6, Cholla Lead	10 MPH.
MP 265.36, Manila, 2 dual control crossovers	50 MPH.
MP 272.9, East Hibbard, dual control crossover	50 MPH.
MP 275.5, West Hibbard, dual control crossover	50 MPH.
Hibbard, WE North Siding	40 MPH.
Hibbard, EE North Siding	10 MPH.
MP 284.5, East Winslow, crossover	50 MPH.
MP 284.7, Crossover	50 MPH.
MP 284.8, East Freight Lead	20 MPH.
MP 284.9, Main 2	50 MPH.
MP 285.3, East Pass Yard Track No 1	20 MPH.

1(D). Speed—Other

Bridges 72.5, 74.73, 123.8, 155.2—Cars heavier than 143 tons	25 MPH.
Lupton, both ends North Storage Main 1, hand throw switch	10 MPH.
Lupton, west end South Storage Main 2, hand throw switch	10 MPH.
Houck, both ends North Storage Main 1, hand throw EL switch	10 MPH.
Cheto, both ends North Storage Main 1, hand throw switch	10 MPH.
Cheto, east end South Storage Main 2, hand throw switch	10 MPH.
Cheto, west end South Storage Main 2, hand throw switch	10 MPH.
Pinta, both ends North Storage Main 1, hand throw switch	10 MPH.
Pinta, both ends South Storage Main 2, hand throw switch	10 MPH.
Adamana, east end North Storage Main 1, hand throw EL switch	10 MPH.
Adamana, both ends South Storage Main 2, hand throw EL switch	10 MPH.
Adamana, inside crossover Main 1 to west long lead MP 233.4, hand throw EL switches	10 MPH.
Adamana, inside crossover MP 233.4 to east end North Storage	10 MPH.
Holbrook, west long lead of South Yard Main 2, hand throw EL switch	10 MPH.
Holbrook, both ends of South Storage Main 2, hand throw EL switch	10 MPH.
Holbrook, west end North Storage Main 1, hand throw EL switch	10 MPH.
Holbrook, both ends of 2 inside crossovers Main 2, MP 253.4 and MP 254.6, into South Yard, hand throw EL switches	10 MPH.
Penzance, both ends storage Main 2, hand throw switches	10 MPH.
Joseph City, Main 1 both ends into yard, hand throw switches	10 MPH.
Joseph City, Main 2 both ends into South Storage, hand throw switches	10 MPH.
Hibbard, both ends of North Storage Main 1, and South Storage Main 2, hand throw EL switches	10 MPH.

Temperature Restrictions—When the air temperature meets the threshold temperatures shown below, all trains must reduce speed to 40 MPH on main tracks through the limits shown unless a more restrictive speed is in effect.

Limits	Threshold Temperature
MP 2.2 to MP 9.4	100 degrees
MP 38.5 to MP 45.9, Main 1	100 degrees
MP 119.0 to MP 124.1, Main 1	100 degrees
MP 130.5 to MP 132.5	100 degrees

If in doubt as to the temperature, contact the train dispatcher. Notify the train dispatcher when your train is restricted to 40 MPH.

See Item 1 of the System Special Instructions for additional speed restrictions.

**2. Bridge and Equipment Weight Restrictions
Maximum Gross Weight if Car**

Belen Jct to East Winslow 143 tons, Restriction A

Six-axle locomotives are restricted from operating on the following tracks:

- Reid 7801, 7802, 7803, 7804, 7805, 7812
- Thoreau 8061, 8063, 8064, 8065, 8066
- Ciniza Ciniza Spur, 8190
- Wingate 8261, 8262
- Zuni 1513, 1514, 1515, 1517, 1518, 1519, 1520, 1521
- Gallup Gamerco tracks, 1615, 1616, 1617, 1608, 1609
Yard Tracks, 1606-1613
- Houck 1922
- Pinta 2192
- Holbrook 8538, 8539
- Winslow Duke City Lumber, 2945

3. Type of Operation

CTC—in effect:

- MP 0.0 to MP 284.5
- Pegs, on both legs of wye.
- MP 231.8 to MP 235.0, N siding Adamana

Multiple Main Tracks—in effect:

- 2 MT:**
MP 0.6 to MP 284.5
- 3 MT:**
MP 0.0 to MP 0.6

4. General Code of Operating Rules Items

Rule 5.8.2—Sounding Whistle—Quiet Zone Locations—Due to quiet zone designation at MP 99.4, NM 605, the requirement to use whistle signal 7 is no longer in effect. All other whistle requirements remain in effect.

Rule 6.2—Initiating Movement—At Winslow, Eastbound freight trains with routing to Albuquerque on the Gallup and Glorieta Subdivisions (WIN/ABQ) must obtain General Track Bulletins for the New Mexico Rail Runner, New Mexico Division, Albuquerque Subdivision before departing Winslow. Crew must contact the NMRX Dispatcher in order to receive current track bulletin restrictions and other conditions affecting train movement between East Isleta and Albuquerque.

NMRX Dispatcher Phone 505-245-4212
NMRX Dispatcher Fax 505-245-4167

Rule 6.19—When flagging is required, distance will be 2.0 miles.

Rule 12.1—ATS in effect on both tracks between Dalies and Marmon, in both directions; on Main 2 between Gonzales and East Winslow, westward movements only; on Main 1 between East Winslow and Gallup, eastward movements only; and on Main 1 between Gonzales and MP 85.9, eastward movements only.

5. Trackside Warning Detectors (TWD)

- A. Protecting bridges, tunnels or other structures: None
- B. Other TWD locations
 - MP 28.3—Exception Reporting—Recall Code 8 (Channel 32 or 50)
 - MP 44.5—Exception Reporting—Recall Code 7
 - MP 45.7X—Exception Reporting—Recall Code 7
 - MP 65.8—Exception Reporting—Recall Code 8
 - MP 74.4—Exception Reporting—Recall Code 7
 - MP 79.7—DED, Exception Reporting—Recall Code 8
 - MP 85.4—DED, Exception Reporting—Recall Code 0

- MP 90.5—Exception Reporting—Recall Code 8
- MP 111.1—Exception Reporting—Recall Code 8
- MP 131.3X—Main 1—Bidirectional—Exception Reporting—Recall Code 8
- MP 131.3—Main 2—Bidirectional—Exception Reporting—Recall Code 7
- MP 153.9—Exception Reporting—Recall Code 8
- MP 171.1—Exception Reporting—Recall Code 8
- MP 188.1—Exception Reporting—Recall Code 8
- MP 205.8—Exception Reporting—Recall Code 8
- MP 225.2—Exception Reporting—Recall Code 8
- MP 249.0—Exception Reporting—Recall Code 8
- MP 270.4—Bidirectional—Exception Reporting—Recall Code 8

C. Other Detectors

- MP 69.8 and MP 70.1—High Water
WWD signals 681 and 683 (will display flashing red aspect when activated.)
EWD controlled signals Laguna MP 71.2
- MP 72.6—High Water—Signals 721, 723, 752 and 754
- MP 91.5—High Water—Signals 901, 903, 922 and 924
- MP 141.8X—High Water
Signal 1401 and 1422 (will display flashing red aspect when activated.)
- MP 150.5—High Water
Signals 1481, 1483, 1502 and 1504 (will display flashing red aspect when activated.)
- MP 174.8—Rock Slide
Signals 1731, 1733—Eastbound Control Signals
Lupton will display flashing red aspect.
- MP 239.4—High Water—Signals 2391, 2393, 2412, 2414

6. FRA Exempted Track—None

7. Special Conditions

Belen Jct.—Trains will be governed by Clovis Subdivision Timetable and Special Instructions.

Pegs—Normal position for loop track switch is lined for clockwise movement.

Gallup—Split point derail on west long lead Gallup Yard, MP 161.2. This derail must be left in the derail position when not in use.

Remote Control Operations—Signs located at MP 888.0 (Clovis Subdivision), MP 930.0 and MP 935.0 (El Paso Subdivision), and MP 2.0 (Gallup Subdivision) designate the Remote Control Area at Belen yard.

Signs located at MP 156.0 and MP 162.0 designate the Remote Control Area at Gallup yard (Includes Gamerco Spur).

102.12.6—Distributed Power/Helper Limitations and Placement—Distributed power manifest trains operating between Belen and Gallup with a single DP remote locomotive may position the remote locomotive at any location between rear end and mid train by car count as long as there are a minimum of 5 cars weighing more than 45 tons immediately ahead of that placement position.

Close Clearances—Do not ride the side of equipment at the following locations due to close clearance:

- Reid** MP 100.7 MT1 Tracks 7801 thru 7803, 7805
- Pegs** MP 118.5 MT1 Track 7992
- Thoreau** MP 125.6 MT1 Track 8051
- South Guam** MP 136.2 MT2 Track 8165 from derail 200 feet east toward main line
- Ciniza** MP 138.9 MT2 Tracks 8193 thru 8194
- Wingate** MP 146.3 MT1 Track 8260
MP 146.5 MT1 Track 8262

Close Track Centers—Do not ride the side of equipment on the following tracks unless the adjacent track is known to be clear:

Gallup MP 158.1 MT1 1603 thru 1605, 1609, 1612

Joseph City MP 262.4 MT1 8638

Short Mile Locations—

MP 195.0 to MP 196.0 2900 feet

MP 251.0 to MP 252.0 4173 feet

HLCS—Hy-Rail Limits Compliance System (HLCS) is in effect on the Gallup Subdivision.

Flash Flood Warnings—The following locations have been identified as “critical areas” subject to flash floods and washouts as outlined in System Special Instructions, Item 33:

MP 140.8 to MP 141.4, Main 2

MP 147.9 to MP 148.0

MP 164.9 to MP 169.0, Main 1

MP 171.4 to MP 175.3, Main 2

MP 194.6 to MP 198.5, Main 2

8. Line Segments

Yard Line Segments

Line Segment Yard

7355 Belen Yard

7250 Gallup Yard

7251 Winslow Yard

Road Line Segments

Line Segment Limits Mile Posts



7200 Belen Jct. to Dalies..... 0.0 to 10.0

7200 Dalies to Winslow 27.4 to 284.5

9. Locations Not Shown as Stations

Name	Mile Post Location	Capacity Feet	Switch Opens
Main 1			
Rio Puerco	34.2	852	East
Garcia	42.2	1,254	East
Suwanee	45.8	3,220	East
Quirk North Set Out	63.5	931	East
Laguna	67.9	1,800	East
Acomita	76.3	1,490	East
Anzac	86.5	488	East
Grants	99.5	5,842	Both
Reid	100.7	4,944	Both
Bluewater	105.8	6,758	Both
West Baca	114.1	1,000	Both
North Guam	136.7	972	Both
Wingate	146.5	2,277	Both
Richardson Dist.	162.8	2806	East
Lupton	178.5	6,737	Both
Houck	190.8	7,220	Both
Chambers	205.9	3,455	East
Navajo	213.3	2,247	East
Pinta	218.5	6,437	Both
Arntz	245.2	584	East
Main 2			
Dalies	9.1	5,314	Both
Garcia	42.2X	1,054	East
Suwanee	47.4	6,786	Both
Quirk South Set Out	63.5	458	East
Laguna	69.7	2,650	West
Anzac	86.1	2,059	Both
Grants	94.4	6,620	Both
Reid	101.6	384	West
Bluewater	107.6	5,844	Both
West Baca	114.4	1,000	Both
Thoreau	125.6	7,128	Both
South Guam	136.2	3,440	West
Ciniza	138.9	3,093	Both
McCune	148.5	5,270	Both
Cheto	199.2	5,259	Both
Chambers	206.1	1,829	West
Pinta	219.2	7,107	Both
Adamana	232.0	5,718	Both
Arntz	245.9	737	West
Holbrook	251.8	5,687	Both
Penzance	257.6	7,505	Both
Joseph City	262.6	3,599	Both
Hibbard	274.2	5,621	Both

10. Grade Chart

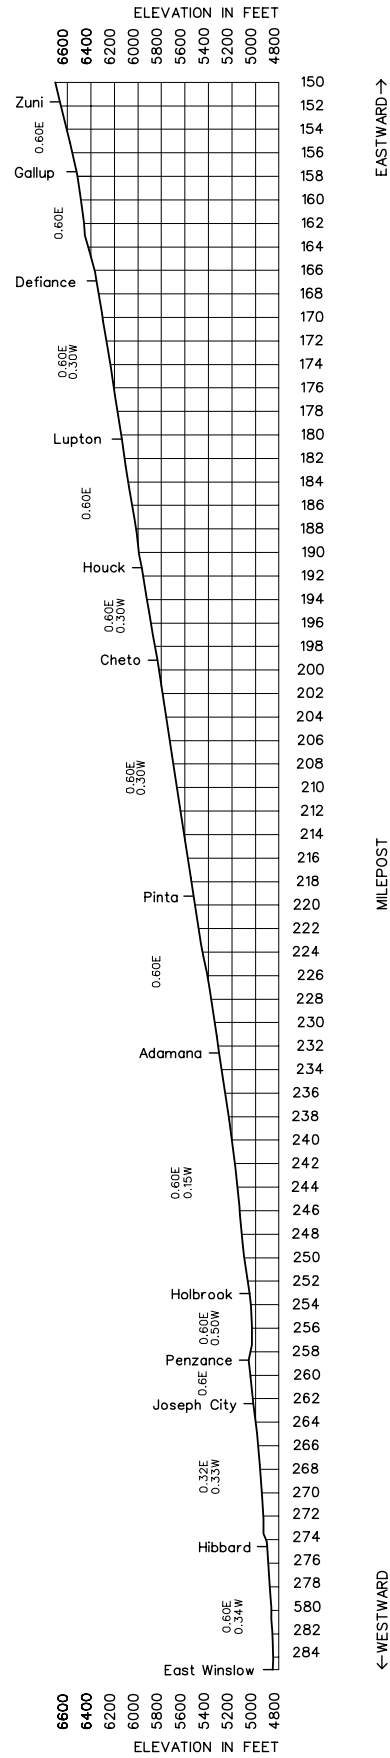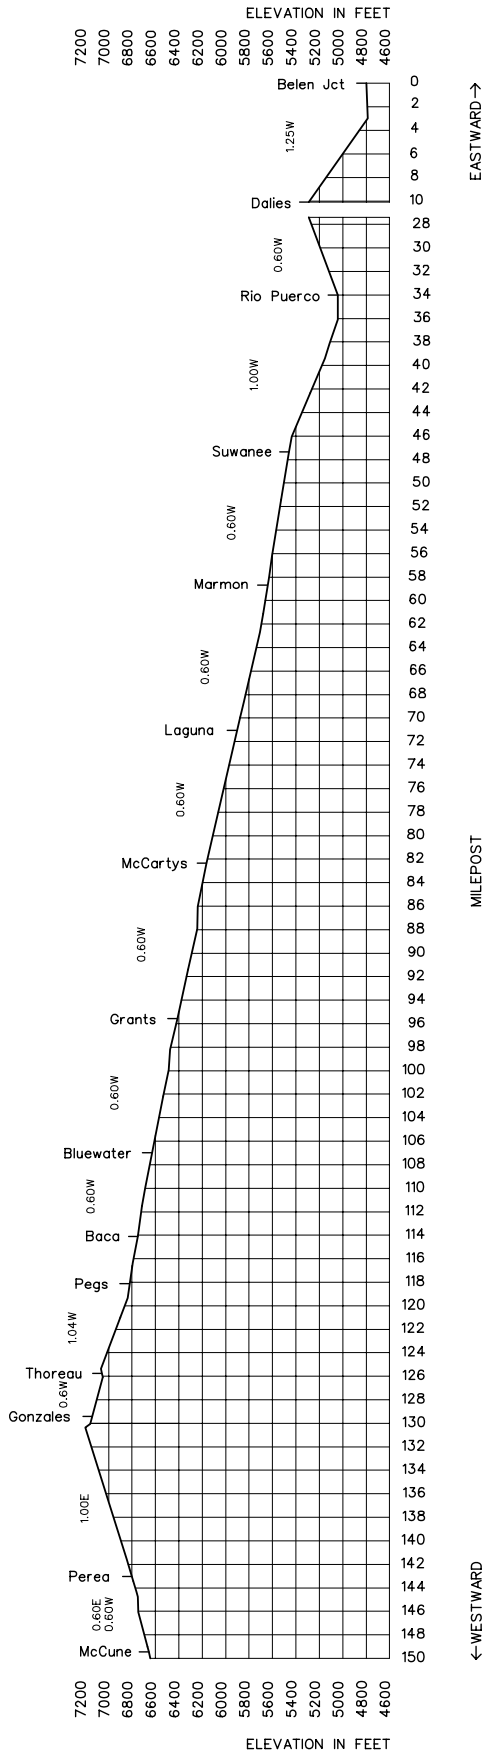

Length of Siding (Feet)	Station Nos.	Mile Post	Glorieta Subdivision MAIN LINE STATIONS		Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.
5,700	56400	770.1	LAS VEGAS	BP		7300	8.4	
4,850	56390	778.5	OJITA				10.3	
5,400	56380	788.8	CHAPELLE				4.8	
4,500	56370	793.6	BLANCHARD		TWC ABS		9.7	
6,385	56359	803.3	SANDS				7.7	
6,632	56340	811.0	GISE				5.0	
4,050	56330	816.0	ROWE				4.4	
8,500		820.4	FOX				4.8	
5,800	56320	825.2	GLORIETA		CTC		4.8	
4,850	56310	830.0	CANYONCITO			5.2		
Between Lamy and East Isleta (BNSF) is under the jurisdiction of NMDOT (NMRX Railroad) Timetable and Special Instructions								
7,500	56190	835.2	LAMY	B	(1)	7305	19.4	
4,750	56180	854.6	WALDO				3.4	
		858.0	CP RAEI	J			7.0	
		865.0	CP EAST DOMINGO				0.3	
1,800	56160	865.3	DOMINGO				0.1	
		865.4	CP WEST DOMINGO				10.2	
		875.6	CP EAST NUEVE		CTC ATS		1.0	
6,386	56150	876.6	NUEVE				0.4	
		877.0	CP WEST NUEVE				6.5	
		883.5	CP RUIZ				1.5	
		885.0	SANDOVAL - 550	C		0.3		
		885.3	CP EAST BERNALILLO			0.7		
6,363		886.0	BERNALILLO	C		0.5		
		886.5	CP WEST BERNALILLO			1.1		
		895.6	LOS RANCHOS	C	(1)	11.2		
	56120	898.8	HAHN		(2)	3.6		
	56100	902.4	ALBUQUERQUE	BC	(3)	1.4		
		903.8	CP ABAJO			2.1		
		905.9	SUNPORT	C		0.5		
		906.4	CP RIO BRAVO			5.5		
		911.9	CP ISLETA LAKES	C	CTC	3.1		
2,425	40015	12.3	EAST ISLETA	J		0.5		
		12.8	WEST ISLETA			14.6		
	20870	27.4	DALIES	X(2)		159.8		

(1)=ABS-TWC-ATS, (2)=DT-TWC-ABS-ATS-RL, (3)=DT-ABS-RL

RADIO COMMUNICATION	Tone Call-In					
	CH	DS	MC	FS	Warm Bearing	Emer
Las Vegas to Dalies	32	1	4	3	5	9
Albuquerque Yard	65	-	-	-	-	9
	46	-	-	-	-	9

Train Dispatcher Telephone Numbers
Chief Dispatcher—(817) 234-2334
Dispatcher (DS 18)—(817) 234-2318

1. Speed Regulations

1(A). Speed—Maximum

	Passenger	Freight
MP 770.1 to MP 27.4	79 MPH	55 MPH

From MP 902.4 to MP 27.4, unless otherwise restricted, the maximum speed for freight trains is 70 MPH provided:

1. Train does not contain empty car(s). Refer to SSI 1(C) for determining speed for multiplatform, intermodal equipment.

2. Train does not exceed 8,500 feet.
3. Train does not average more than 80 TOB.
4. Engineer can control speed to 70 MPH without use of air brakes. (If unable to control speed to 70 MPH on long descending grades, two additional attempts are allowed to control speed with dynamic brake at slower speeds before speed must be reduced to 55 MPH while negotiating descending grade.)

Trains operating with solid double stack equipment only, may use a maximum of 32 axles of dynamic braking per engine consist.

1(B). Speed—Permanent Restrictions

	Passenger	Freight
MP 770.7 to MP 772.0	75 MPH	60 MPH
MP 772.6 to MP 772.8 *	40 MPH	35 MPH
MP 772.8 to MP 779.4 *	50 MPH	45 MPH
MP 779.4 to MP 781.9	55 MPH	50 MPH
MP 782.3 to MP 784.1	40 MPH	40 MPH
MP 784.7 to MP 784.9	40 MPH	40 MPH
MP 786.1 to MP 786.3	60 MPH	45 MPH
MP 786.5 to MP 787.0 * **	50 MPH	45 MPH
MP 788.4 to MP 790.5	50 MPH	45 MPH
MP 790.8 to MP 793.9	45 MPH	40 MPH
MP 794.3 to MP 794.5	45 MPH	
MP 794.7 to MP 795.2 * **	45 MPH	20 MPH
MP 795.2 to MP 799.9 * **	25 MPH	20 MPH
MP 800.4 to MP 802.8 * **	50 MPH	45 MPH
MP 804.0 to MP 805.1 * **	55 MPH	45 MPH
MP 805.1 to MP 805.8 * **	45 MPH	45 MPH
MP 805.8 to MP 808.8 * **	50 MPH	45 MPH
MP 812.3 to MP 812.8	50 MPH	45 MPH
MP 812.8 to MP 814.3	45 MPH	40 MPH
MP 814.3 to MP 814.4	60 MPH	
MP 815.0 to MP 815.6	65 MPH	
MP 818.6 to MP 818.9	55 MPH	50 MPH
MP 819.2 to MP 819.5 * **	50 MPH	40 MPH
MP 819.6 to MP 819.7 * **	40 MPH	35 MPH
MP 819.7 to MP 824.6	50 MPH	35 MPH
MP 824.6 to MP 824.9 * **	35 MPH	30 MPH
MP 824.9 to MP 825.8 * **	25 MPH	20 MPH
MP 825.8 to MP 827.8 * **	20 MPH	20 MPH
MP 827.8 to MP 829.5 * **	25 MPH	20 MPH
MP 830.2 to MP 831.7 * **	40 MPH	30 MPH
MP 832.1 to MP 832.9 * **	20 MPH	20 MPH
MP 833.1 to MP 835.0	65 MPH	50 MPH
MP 12.8 to MP 13.6	70 MPH	
MP 26.8 to MP 27.4	50 MPH	40 MPH

* Equipped with Westward ATS Inert Inductors

** Equipped with Eastward ATS Inert Inductors

1(C). Speed—Switches and Turnouts

Trains and engines using auxiliary tracks must not exceed turnout speed for that track unless otherwise indicated.

Las Vegas	10 MPH	10 MPH
Sands, Gise, Fox and Lamy, both ends siding	30 MPH	30 MPH
Glorieta, both ends siding	20 MPH	20 MPH
Dalies, switch MP 27.4	40 MPH	40 MPH
Dalies, crossover MP 27.5	40 MPH	40 MPH
Dalies, crossover MP 27.6	50 MPH	50 MPH

1(D). Speed—Other

Sidings—Las Vegas, Ojita, Chapelle, Blanchard, Rowe, and Canyoncito	10 MPH	10 MPH
MP 793.9 to MP 799.9, WWD	20 MPH	
MP 825.2 to MP 833.0, WWD		
90 TOB and over	15 MPH	
Less than 90 TOB	20 MPH	

Temperature Restrictions—When the air temperature meets the threshold temperatures shown below, freight trains must reduce speed to 40 MPH and passenger trains must reduce speed to 60 MPH on main tracks through the limits shown unless a more restrictive speed is in effect.

Limits	Threshold Temperature
MP 772.6 to MP 871.1	100 Degrees
MP 13.2 to MP 24.0	100 Degrees

If in doubt as to the temperature, contact the train dispatcher. Notify the train dispatcher when your train is restricted.

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions
MP 770.1 to MP 27.4..... 143 tons, Restriction B

3. Type of Operation
TWC—in effect:
MP 770.1 to MP 815.4

ABS—in effect:
MP 770.1 to MP 815.4

CTC—in effect:
MP 815.4 to MP 836.2
MP 903.8 to MP 27.4

Restricted Limits—in effect:
Albuquerque, MP 901.1 to end double track MP 903.8

All trains and engines must receive permission from the Dispatcher (DS-18) prior to entering Restricted Limits between MP 901.1 and MP 903.8 for all movements. Permission must be obtained from the Dispatcher to make any moves against the current of traffic on Main 1 and Main 2. The dispatcher must communicate with any train or engine wishing to enter or foul either main track within the restricted limits, including through train such as Amtrak. Trains and engines must report back to the dispatcher when they are clear of the main track within the limits.

4. General Code of Operating Rules Items
Rule 1.14—BNSF trains may use NMRX Joint Track between East Isleta and Lamy

Rule 6.19—When flagging is required, distance will be 2.0 miles.

- 5. Trackside Warning Detectors (TWD)**
- A. Protecting bridge, tunnel or other structures: None
 - B. Other TWD locations:
MP 774.9—Recall Code 8
MP 809.2—Recall Code 8
 - C. Other detectors:
Slide Fence—MP 826.7 to MP 826.9
Signals 8272
WWD controlled signals at WSS Glorieta

6. FRA Excepted Track—None

7. Special Conditions
Running Air Brake Test—A running air brake test per ABTH Rule 100.13 must be performed by all westward freight trains between MP 770.1 and MP 820.4.

Empty Unit Coal Trains— All empty unit coal train movements on the Glorieta Subdivision with the head 15 cars consisting of any aluminum equipment and operating with all of the locomotive power on the head end of the train, must limit their dynamic braking to 24 axles. Information concerning dynamic brake axle rating is located in the System Special Instructions.

Passenger Trains—Westward passenger trains must make a running air brake test between Rowe and Glorieta before passing the summit of the grade to determine the following:
A. The retarding force of the air brake system.
B. To insure the normal brake pipe pressure changes occur at the rear of train.

Automatic Brake Valve Cutout Position—When operating freight trains on descending grades between MP 775 and MP 810 and MP 818 to MP 842 on the Glorieta Subdivision, the Automatic Brake Valve Cutout Valve (ABTH Rule 102.16) will be placed in the “FRT” position. In the event of equalizing reservoir leakage while operating on the descending grade between MP 775 and MP 810, or MP 818 to MP 842, the train must be stopped. After stopping, the train must be properly secured and the Automatic Brake Valve Cutout Valve placed in the “PASS” position. The train brake system must be fully charged before proceeding.

The use of Retainers between Glorieta and Lamy—Speed restrictions, dynamic brake requirements, and special instructions governing the use of retainers for freight trains on descending grades between MP 825.2 and MP 833.0:

Dynamic Brake requirements for westward freight trains (The locomotive weight will not be included in the train tonnage except for those units on which the dynamic brake is inoperative.):

Minimum Number of Operative Axles of Dynamic Brakes Westward from MP 825.5 to MP 833.0:								
Total Trailing Train Tonnage	TOB 75 or less	TOB 76 to 85	TOB 86 to 95	TOB 96 to 105	TOB 106 to 115	TOB 116 to 125	TOB 126 to 135	TOB 136 to 145
2,000 or less	4	4	6	6	8	8	8	10
2,001 to 4,000	10	12	14	16	18	18	20	22
4,001 to 5,000	12	14	18	20	20	22	24	26
5,001 to 6,000	14	18	20	22	24	26	28	30
6,001 to 7,000	16	20	22	24	28	30	32	34
7,001 to 8,000	16	22	24	28	32	34	36	38
8,001 to 9,000	18	24	28	32	36	38	40	42
9,001 to 10,000	20	26	32	36	38	42	44	46
10,001 to 12,000	24	32	38	42	46	50	52	54
12,001 to 14,000	28	36	42	48	54	58	60	64
14,001 to 16,000	28	38	46	52	58	62	66	70

Total minimum operative axles of dynamic brake for trains (including helpers) is in the body of the table. When using this table, round calculations up to the next whole number when determining TOB. For example, 105.1 TOB becomes 106 TOB. For purposes of this rule, the weight of locomotives with inoperative dynamic brakes is to be included in the train's total trailing tonnage. Note: Maximum of 28 equivalent dynamic brake axles may be cut in on the lead consist of freight trains. (ABTH Rule 103.2.1, Item 1)

- A. Before leaving MP 825.2 it must be known that the locomotive consist has the minimum number of operative axles of dynamic brake (see the above table). If the train does not meet the minimum requirement, the train must not proceed. A Helper consist may be added to meet this requirement.
- B. After leaving MP 825.2, if the dynamic brake on the locomotives in the consist become inoperative, or one of the trailing locomotive's dynamic brake becomes inoperative, and the loss of dynamic brake causes the train to have less than the minimum required amount of dynamic brake axles, and the engineer has the train under control, the train may proceed without stopping.

- C. While operating on the descending grade between MP 825.2 and MP 833.0, when a dynamic brake failure results in less than the minimum dynamic brake axle requirements, the train may proceed down the descending grade if the speed is controlled, but must reduce speed to 15 MPH until the rear of the train has reached MP 833.0.
- D. Should conditions such as loss of dynamic brakes or an undesired emergency applications, such as a kicker, an air hose separation, etc., prevent the ability to control the speed normally by using the balance braking method, retainers must be applied as per ABTH Rule 103.7.6.
- E. Except between MP 825.2 and MP 833.0, freight trains which average 90 TOB or more and operating with locomotives not using dynamic brakes the maximum speed on descending grades is:
 - MP 833.0 to MP 865.3 40 MPH.
 - MP 825.2 to MP 770.1 25 MPH.

Applying Retainers—ABTH Rule 103.7 Grade Operation applies to freight trains operating between MP 825.2 and MP 833.0. The grade for this location is to be considered 3.1%-3.5% for the purpose of applying retainers (ABTH Rule 103.7.6).

Brake Pipe Reduction to Control Train Speed—Between MP 825.2 and MP 833.0, the total brake pipe reduction to control the train speed must not exceed 18 psi for trains averaging less than 135 TOB and 14 psi for trains averaging 135 or more TOB. If the total brake pipe reduction exceeds the above limitations, the train must be stopped immediately.

- A. To control the train speed, a sufficient number of retainers (not less than 20), starting behind the lead locomotives, must be set in the high pressure position before releasing the train brakes. See ABTH Rule 103.7.6.
- B. Before proceeding, the brake system must be fully recharged. The excessive use of engine brakes to control the train speed is prohibited.

Emergency Application Requirements—All train crew members operating on the Glorieta Subdivision, from MP 775 to MP 810 and from MP 818 to MP 842, must take action to stop the train with an emergency application of the brakes should the train exceed 5 MPH over the maximum authorized speed.

Freight trains on descending grades between MP 825.2 and MP 833.0 experiencing air brake problems, must stop immediately using an emergency air brake application, if necessary, and secure the train. The train must not proceed until the air brake system is repaired.

At MP 825.2 freight trains required to stop before descending the grade must recharge the train brake system before proceeding.

Recharging the brake system—Between MP 825.2 and MP 833.0 under certain conditions such as an undesired emergency, a break-in-two, an emergency stop, etc., where it is necessary to hold the train while the brake system is being recharged, starting behind the lead locomotive, apply a sufficient number of hand brakes to hold train, (ABTH Rule 102.1). The brake system must be fully charged after which a brake pipe reduction must be made sufficient enough to hold the train while the hand brakes are being released. Before proceeding, all hand brakes must be released.

Siding sign on a stop signal—When the letter “S” (siding sign) is displayed on a stop signal, the train must stop and a crew member will operate the switch to enter the siding or the diverging route. The train will then be governed by signal indication.

Two-Way ETD Certification Form—In the application of ABTH Rule 102.13.3, Testing Emergency Function, all trains operating on the Glorieta Subdivision between Las Vegas and Albuquerque must have a valid ETD certification form. The ETD certification form is valid until the train reaches its destination unless the ETD or HTD are exchanged enroute. A copy of the ETD certification form must be placed in the controlling locomotive with the daily inspection form and with the Equipment Department at the location where the certification is performed, or in the timeslip box upon tie-up. Engineers and conductors are jointly responsible for meeting these requirements. Equipment or herder personnel when available will assist in the arming process.

Cold Temperature Air Brake Test—When extreme cold temperatures occur, brake cylinders on freight equipment are more prone to leakage. To assure that a brake application can be maintained effectively for trains descending the mountain grades on the Glorieta Subdivision, perform the following air brake test prior to departing the locations listed below. This test is required on freight trains exceeding 1500 tons averaging over 100 TOB, when temperatures are below zero degrees Fahrenheit (-0 F):

Crew members must perform the following air brake test on their train prior to departing MP 825.2 on westward trains operating on the Glorieta Subdivision:

- A. Fully charge the air brake system.
- B. Make a 20-psi brake pipe reduction.
- C. Do not nullify the pressure maintaining feature of the automatic brake valve during this test (such as when performing a brake pipe leakage test).
- D. Wait 20 minutes.
- E. Inspect train for any brakes that either did not apply or have released.
- F. Set out all cars that have released during this inspection before departing.

Winter Train Operations—Operating practice requirements as prescribed by ABTH Rule 103.7.7, Inclement Weather Running Air Brake Test on Grade will be complied with by all westward trains at MP 825.2 at a speed not exceeding 10 MPH.

TTOX and TTFX Restrictions—Two-axle cars (TTOX, Car Kind Code QA) and multi-axle cars (TTFX, Car Code QDE) are restricted from operating between Las Vegas and Nueve on the Glorieta Subdivision.



Maximum Trailing Tonnage for Head End Power—

- Westward:
 - A. Las Vegas to Lamy- General Service (“C” Grade Steel) 8060 tons. Unit trains with Grade “E” equipment 11,200 tons.
 - B. Lamy to Albuquerque- General Service (“C” Grade Steel) 18,850 tons. Unit Trains with Grade “E” equipment 26,200 tons.
- Eastward:
 - A. Albuquerque to Lamy- General Service (“C” Grade Steel) 18,850 tons. Unit Trains with Grade “E” equipment 26,200 tons.
 - B. Lamy to Las Vegas- General Service (“C” Grade Steel) 4,600 tons. Unit Trains with Grade “E” equipment 6,390 tons.

Exception: In the application of this rule, articulated spine cars are considered Grade “E” equipment.

Between Las Vegas and Lamy, Double Stack equipment loaded with more than one level of containers will not be operated over this route.

10. Grade Charts

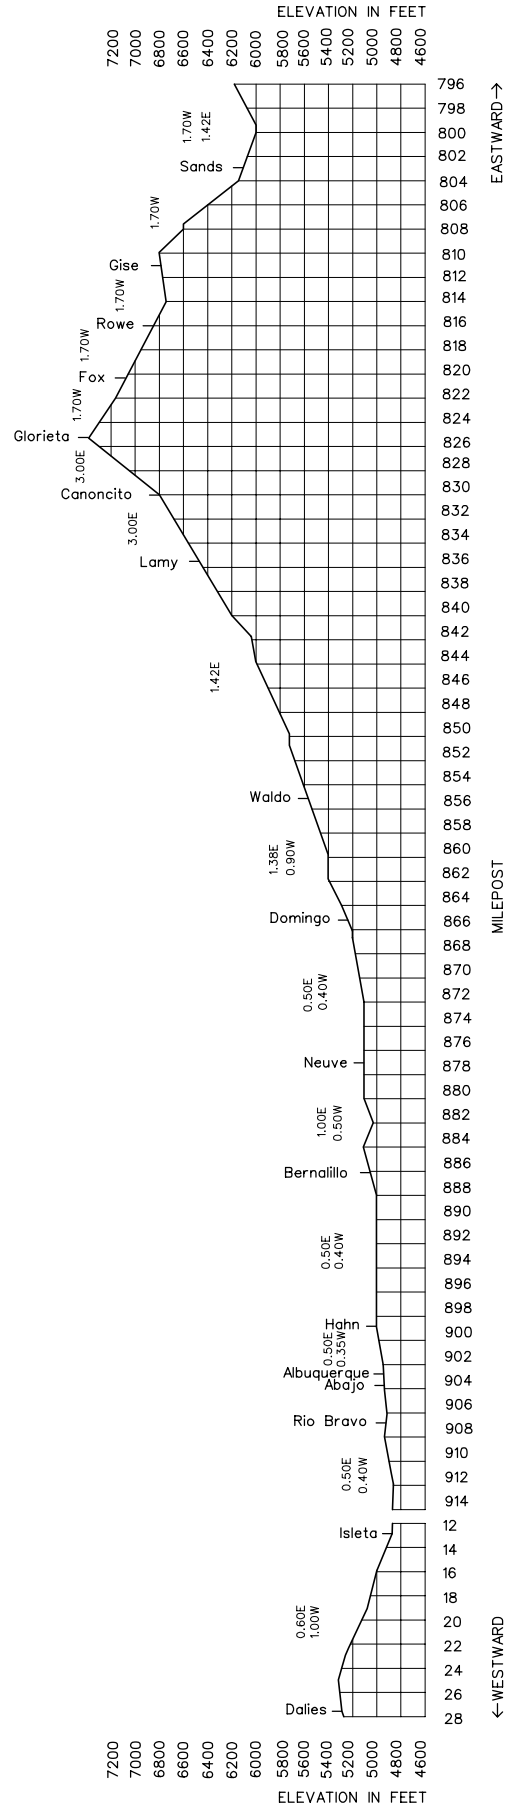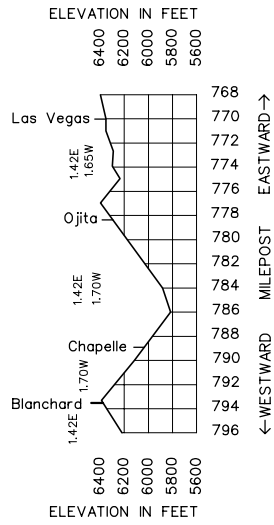

WESTWARD ↓	Length of Siding (Feet)	Station Nos.	Mile Post	Lee Ranch Subdivn.		Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.	EASTWARD ↑
				MAIN LINE STATIONS						
		20745	115.4	LEE RANCH	R	TWC	7202	15.4		
		20740	100.0 27.3	LEE RANCH JCT. To Hospah Jct. 5.1	J	CTC	7201	10.2		
		20736	17.1	AMBROSIA		TWC		12.1		
		20730	5.0	ESCALANTE JCT.				4.1		
			0.9	BACA				0.9		
			0.0	WEST BACA	X	CTC		42.7		

Tone Call-In						
RADIO COMMUNICATION	CH	DS	MC	FS	Warm Bearing	Emer
Lee Ranch to West Baca	36	1	4	3	5	9

Train Dispatcher Telephone Numbers

Chief Dispatcher—(817) 234-2334

Dispatcher (DS 08)—(817) 234-2308

1. Speed Regulations

1(A). Speed—Maximum

Freight

MP 112.3 to MP 0.9, including trains 100 TOB and over49 MPH.
East and West Leg of Wye Baca.....40 MPH.

1(B). Speed—Permanent Restrictions—None

1(C). Speed—Switches and Turnouts

Trains and engines using auxiliary tracks must not exceed turnout speed for that track unless otherwise indicated.
MP 27.3 Lee Ranch Jct., turnout to Hospah Jct40 MPH.
West Baca—switch to Main 140 MPH.
East Baca—switch to Main 140 MPH.
Baca—switch to stem of wye40 MPH.
Baca wye storage—WE storage 0.930 MPH.
Baca wye storage—EE storage 2.2 spring switch30 MPH.

1(D). Speed—Other

Locomotive cranes/pile drivers and Jordan spreaders.....25 MPH.
Lee Ranch loading track and switch10 MPH.
Hospah Spur.....10 MPH.
Escalante Spur.....15 MPH.

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions
Maximum Gross Weight of Car

Lee Ranch to West Baca..... 143 tons, Restriction A

3. Type of Operation

CTC—in effect:
MP 27.2 to MP 27.3
MP 0.9 to MP 0.0
Baca on east leg of wye

TWC—in effect:
MP 112.3 to MP 27.3
MP 27.2 to MP 0.9
MP 27.3, Lee Ranch Jct. to MP 32.4/MP 200.0, Hospah Jct.

Restricted Limits—in effect:
MP 115.4 to MP 112.3
MP 200.0, Hospah Jct. to MP 203.4, El Segundo

4. General Code of Operating Rules Items

Rule 6.19—When flagging is required, distance will be 1.5 miles.

5. Trackside Warning Detectors (TWD)—None

6. FRA Exempted Track—None

7. Special Conditions

Lee Ranch—Normal position for loop track switch is lined for counterclockwise movement.

HLCS—Hy-Rail Limits Compliance System (HLCS) is in effect on the Lee Ranch Subdivision.

Flash Flood Warnings—The following locations have been identified as “critical areas” subject to flash floods and washouts as outlined in System Special Instructions, Item 33:
None

8. Line Segments

Road Line Segments


Line Segment Limits

7201 Lee Ranch Jct. to West Baca
7202 Lee Ranch to Lee Ranch Jct.
7203 Hospah Jct. to Hospah

9. Locations Not Shown as Stations

Name	Mile Post Location	Capacity Feet	Switch Opens
Hospah Loop Trk	203.4	9,500	
Hospah Spur Pass Trk	200.7	6,910	Both
Hospah Spur	200/32.4	200	West
Lee Ranch Coal Loop Storage	114.8	797	West
Lee Ranch Mine Storage	112.3	6,840	Both
Ambrosia	17.1	147	Both
Escalante	5.0	3.2 Miles	East
Wye Storage	0.9	6,451	Both

10. Grade Chart

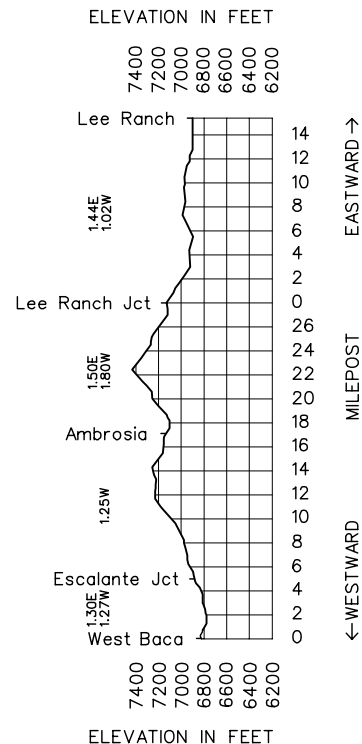

WESTWARD ↓	Length of Siding (Feet)	Station Nos.	Mile Post	Phoenix Subdivision MAIN LINE STATIONS		Rule 4.3	Type of Oper.	Line Segment	Miles to Next Stn.	EASTWARD ↑
		20125	375.2	WEST WILLIAMS JCT.	JX				4.0	
5,600	20150	379.2		WILLIAMS				7206	5.0	
	20180	384.2		SERENO					17.0	
5,650	20200	401.2 0.0		ASH FORK	P		TWC	7207	21.2	
	20210	21.2		DRAKE	JT				7.2	
6,188	20240	28.4		ABRA					17.8	
6,262	20275	46.2		TUCKER					34.3	
	20280	80.5		EAST SKULL VALLEY			DT		1.2	
		81.7		WEST SKULL VALLEY			TWC		19.8	
8,200	20297	101.5		HILLSIDE					8.2	
6,252	20305	109.7		DATE			TWC	7208	25.3	
	19550	135.0		MATTHIE	JT				15.3	
7,100	19558	150.3		CASTLE HOT SPRINGS					18.5	
	19566	168.8		EAST BEARDSLEY			DT		1.3	
		170.1		WEST BEARDSLEY			TWC		4.1	
		174.2		EL MIRAGE					5.7	
	19654	179.9		PEORIA					3.8	
	19690	183.7		GLENDALE	R				4.6	
	19694	188.3		ALHAMBRA	TR				3.3	
	19700	191.6		MOBEST	BCTR				2.1	
	19700	193.7		PHOENIX	TR				219.7	

RADIO COMMUNICATION	Tone Call-In					
	CH	DS	MC	FS	Warm Bearing	Emer
West Williams Jct. to Ash Fork	84	1	4	3	5	9
Ash Fork to MP 181.2	84	1	4	3	5	9
MP 181.2 to MP 189.6	36	1	4	3	5	9
MP 189.6 to MP 193.7	55	1	4	3	5	9

Train Dispatcher Telephone Numbers
Chief Dispatcher—(817) 234-2334
Dispatcher (DS 13)—(817) 234-2313

1. Speed Regulations

1(A). Speed—Maximum

Freight

MP 375.2 to MP 193.7, including trains 100 TOB and over49 MPH.

1(B). Speed—Permanent Restrictions

MP 375.1 to MP 381.140 MPH.
 MP 381.1 to MP 391.0X35 MPH.
 MP 391.0X to MP 392.0X30 MPH.
 MP 392.0X to MP 40235 MPH.
 MP 0.0 to MP 0.830 MPH.
 MP 0.8 to MP 13.940 MPH.
 MP 13.9 to MP 16.230 MPH.
 MP 16.2 to MP 21.135 MPH.
 MP 21.1 to MP 23.230 MPH.
 MP 23.2 to MP 24.440 MPH.
 MP 64.6 to MP 80.540 MPH.
 MP 80.5 to MP 81.7, Main 1 and Main 240 MPH.
 MP 81.7 to MP 83.440 MPH.
 MP 83.4 to MP 123.230 MPH.
 MP 134.3 to MP 134.840 MPH.
 MP 134.8 to MP 135.225 MPH.
 MP 135.2 to MP 135.630 MPH.
 MP 135.6 to MP 140.035 MPH.
 MP 140.0 to MP 150.330 MPH.
 MP 168.8 to MP 170.1, Main 1 and Main 230 MPH.
 MP 174.8 to MP 179.0 (HER) EWD40 MPH.

Freight

MP 179.0 to MP 181.2 (HER)30 MPH.
 MP 181.2 to MP 191.0 (HER)20 MPH.
 MP 191.0 to MP 191.1 (HER)10 MPH.
 MP 191.1 to MP 192.920 MPH.
 MP 192.9 to MP 193.710 MPH.

1(C). Speed—Switches and Turnouts

Trains and engines using auxiliary tracks must not exceed the turnout speed for that track unless otherwise indicated.
 MP 168.8 Beardsley, EB Main 2 over spring switch30 MPH.
 MP 170.1 Beardsley, WB Main 1 over spring switch30 MPH.
 MP 80.5 Skull Valley, EB Main 2 over spring switch30 MPH.
 MP 81.7 Skull Valley, WB Main 1 over spring switch30 MPH.
 At Beardsley and at Skull Valley, the normal position of switches is lined for right-hand movement.

1(D). Speed—Other

Freight trains with dynamic brakes not in use on descending grades
 MP 375.0 to MP 400.5, WWD25 MPH.
 MP 12.0 to MP 31.5, WWD30 MPH.
 MP 54.9 to MP 145.0, WWD30 MPH.
 MP 95.4 to MP 89.0, EWD30 MPH.

Temperature Restrictions—When the air temperature meets the threshold temperatures shown below, all trains must reduce speed to 40 MPH on main tracks through the limits shown unless a more restrictive speed is in effect.

Limits	Threshold Temperature
MP 24.4 to MP 83.5	100 Degrees
MP 123.2 to MP 134.5	110 Degrees
MP 150.3 to MP 168.8	110 Degrees
MP 170.1 to MP 174.8	110 Degrees

If in doubt as to the temperature, contact the train dispatcher. Notify the train dispatcher when your train is restricted to 40 MPH.

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions
Maximum Gross Weight of Car

West Williams Jct to Phoenix 143 tons, Restriction C

Six-Axle Locomotive Restrictions—Six-axle locomotives are restricted from operating on the following auxiliary tracks:

Peoria	Peoria Team Track, Track 2201
Hillside	Sulphur Spur, Track 3203
Phoenix	Track 0201 Wye
Alhambra	Track 0931 Wye and Tail of Wye
Alhambra	Track 1201 John Deere Lead

Drake - The wye tracks at Drake are not to be used for meeting of trains or turning locomotives with six-axle trucks. Four axle truck units can be turned on the wye when instructions are given by the dispatcher.

3. Type of Operation

Restricted Limits—in effect:
 MP 181.2 to MP 193.7

TWC—in effect:
 MP 375.2 to MP 181.2

Double Track—in effect:
 MP 80.5 to MP 81.7
 MP 168.8 to MP 170.1

4. General Code of Operating Rules Items

Rule 1.14—At Matthie, all movements on the wye belonging to the A&C RR between MP 0.0 and MP 1.5 will be governed by Rule 6.13, Yard Limits. Before operating on this track, contact the Phoenix Dispatcher who will contact the A&C RR Dispatcher for instructions.

At Phoenix, BNSF and UP trains may jointly use tracks at east and west end of Union Depot.

Rule 5.8.2—Sounding Whistle—Quiet Zone Locations— Whistle signal 5.8.2 (7) is not required at the following crossing locations. All other whistle requirements remain in effect.

Location	Milepost
163rd Avenue	MP 167.18
RH Johnson Blvd.....	MP 168.80
Meeker Blvd.....	MP 170.14

Rule 6.19—When flagging is required, distance will be 1.5 miles.

Rule 6.24 Double Track

MP 168.8 to MP 170.1	At Beardsley, 6,050 ft.
MP 80.5 to MP 81.7	At Skull Valley, 6,500 ft.

When meeting or passing trains at Beardsley or Skull Valley, trains must approach end of double track at restricted speed until it is visually determined that the train to be met or passed is not fouling the clearance point of double track on either end.

Safety Rule S-13.5—On the Phoenix Subdivision, between Phoenix and Beardsley, at road crossings, it will be permissible for employees to board or dismount from moving equipment on paved surfaces, i.e., asphalt & concrete, not to exceed 4 MPH.

5. Trackside Warning Detectors (TWD)

- A. Protecting bridges, tunnels or other structures: None
- B. Other TWD locations
 - MP 0.4—Exception Reporting—Recall Code 8
 - MP 23.5—Recall Code 8
 - MP 46.9—Recall Code 8
 - MP 88.8—Recall Code 8
 - MP 113.9—Recall Code 8
 - MP 137.9—Recall Code 8
 - MP 155.4—Recall Code 8
 - MP 173.0—Recall Code 8
 - MP 381.6—Recall Code 8
- C. Other Detectors
 - MP 88.9—High Water—Signs MP 88.0 and MP 89.7
 - MP 143.3—High Water—Signs MP 143.4 and MP 145.0
 - MP 146.6—High Water—Signs MP 145.5 and MP 147.4

6. FRA Excepted Track—None

7. Special Conditions

Close Clearances—Do not ride the side of equipment at the following locations due to close clearance:

Glendale	MP 182	Track 1770	Electric Gate
	MP 182	Track 1774	Electric Gate
	MP 182	Track 1776	Electric Gate
	MP 182.56	Track 1759	Gate
	MP 182.56	Track 1765	Gate
	MP 182.56	Track 1766	Gate
	MP 185	Track 1417	Gate
	MP 186	Track 1238	Dock
	MP 186.5	Track 1219	Building
	MP 187	Track 922	Gate
	MP 187	Track 935	Gate
	MP 187	Track 943	Gate
	MP 187	Track 1313	Gate
	MP 188	Track 916	Gate
	MP 189.23	Track 719	Gate
	MP 188.23	Track 902	Gate
	Alhambra	MP 188.61	Track 701
MP 188.23		Track 1107	Gate

Mobest Yard	MP 191	Tracks 434-435	Gate
Phoenix	MP 192	Track 106	Gate
	MP 192	Track 132	Gate
	MP 192	Track 242	Gate
	MP 192	Tracks 244-245	Gate
	MP 192	Track 262	Gate
	MP 192	Tracks 547-548	Gate
	MP 192	Track 552	Gate
	MP 192	Track 554	Gate
	MP 191	Tracks 504-505	Steam Pipes in between tracks

Train Makeup—Eastward trains operating between Phoenix and West Williams Jct. are not to exceed 6,500 tons or 7,500 feet in length. Westward freight trains operating between West Williams Jct. and Phoenix are not to exceed 9,100 tons. Westward freight trains exceeding 7,500 tons must be operated with helper/distributed power.

Westward freight trains exceeding 7,500 tons must have a minimum of 24 rated dynamic brake axles when operating on descending grade between MP 375.0 and MP 400.5. The total rated dynamic brake axles required may include the RDBA of the helper/distributed power consist.

Except trains made up entirely of empty flat cars, trains exceeding 5500 tons must have all the empty flat cars in the rear of train. The tonnage behind any empty flat car cannot exceed 5500 tons.

Cars loaded with empty trailers, empty containers, or empty chassis are considered loads.

Test Mile Locations

MP 33 to MP 34
MP 165 to 166

Short Mile Locations—

MP 392.1 to MP 395.7X	3168 feet
MP 393.0 to MP 394.0	4538 feet
MP 0.0 to MP 1.0	3846 feet
MP 65.0 to MP 80.0	2640 feet

HLCS—Hy-Rail Limits Compliance System (HLCS) is in effect on the Phoenix Subdivision.

Flash Flood Warnings—The following locations have been identified as “critical areas” subject to flash floods and washouts as outlined in System Special Instructions, Item 33:

MP 32.2 to MP 35.2
MP 84.5 to MP 86.5
MP 133.0 to MP 147.5

8. Line Segments

Yard Line Segments

Line Segment	Yard
7252	Mobest Yard


Road Line Segments

Line Segment	Limits
7206	Williams Jct. To Daze
7207	Daze to Ash Fork
7208	Ash Fork to Phoenix

9. Locations Not Shown as Stations

Name	Mile Post Location	Capacity Feet	Switch Opens
Daze	393.3	601	East
Meath	9.0	350	East
Drake (N. Side)	20.6	350	East
Abra	27.9	350	West
Kayfour	34.4	1,480	Both
Kirkland	86.8	4,006	Both
Grand View	95.4	3,460	Both
Piedmont	116.4	1,878	Both
Congress	123.2	3,598	Both
South Matthie	135.2	1,100	Both
Wickenburg	139.6	2,231	Both
Wittman	157.6	2,000	Both
Lizard Acres	171.6	948	Both
Surprise	172.5	937	Both
Ennis Junction	173.6	2,000	Both

10. Grade Chart

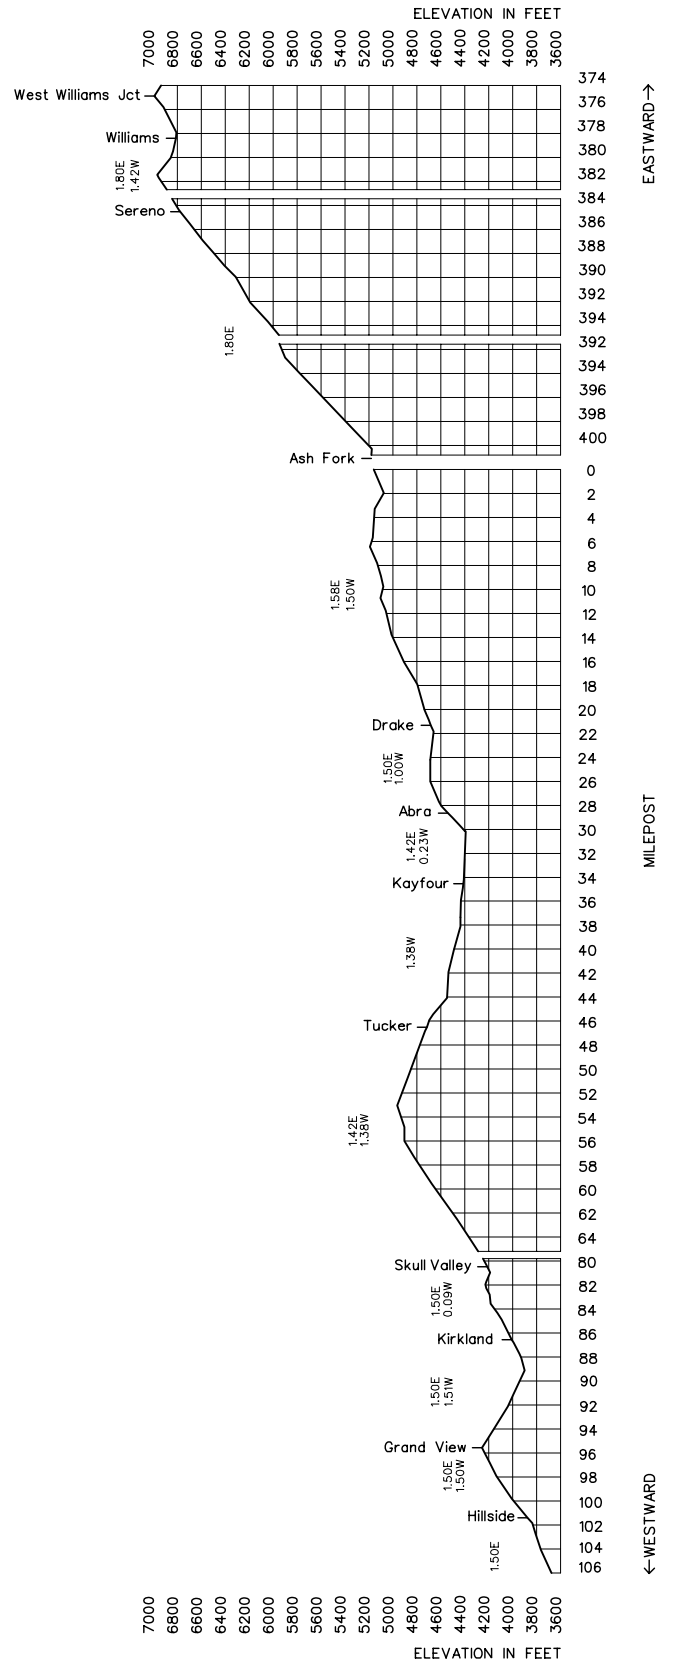

WESTWARD ↓	Length of Siding (Feet)	Station Nos.	Mile Post	Seligman Subdivn.		Type of Oper.	Line Segment	Miles to Next Stn.	EASTWARD ↑
				MAIN LINE STATIONS	Rule 4.3				
			284.5	EAST WINSLOW	X(2)		7200	0.8	
			285.3	CP 2853				1.3	
6867	20500		286.6	WINSLOW	BCPT	2MT CTC ATS	0.1		
			286.7	CP 2867			1.2		
			287.9	WEST WINSLOW	X(2)	3MT CTC/ATS	12.5		
			300.4	DENISON	X(2)		10.1		
(1) 6,436	20440		310.5	EAST CANYON DIABLO	X	2MT CTC ATS	1.6		
			312.1	WEST CANYON DIABLO	X		14.6		
	20420		326.7	EAST DARLING	X		2.8		
			329.5	WEST DARLING	X		8.8		
			338.3	MC PHETRIDGE		2MT CTC	2.5		
			340.8	EAST FLAGSTAFF	X(2)		4.0		
	20400		344.8	WEST FLAGSTAFF			9.7		
			354.5	EAST BELLEMONT	X(2)		7.6		
	20382		362.1	MAINE	X(2)		6.0		
			368.1	CHALENDER	X(2)		6.2		
(1) 2,400	20125		374.3	EAST WILLIAMS JCT.	X		0.7		
			375.0	WEST WILLIAMS JCT.	X		8.1		
			383.1	EAST PERRIN	X		2.5		
	20120		385.6	WEST PERRIN	X	2MT CTC ATS	6.4		
			392.0	EAST DOUBLEA	X		3.1		
	20115		395.1	WEST DOUBLEA	X		10.4		
			405.5	EAST EAGLE NEST	X		2.0		
	20109		407.5	WEST EAGLE NEST	X		10.8		
	20105		418.3	EAST CROOKTON	X		2.2		
			420.5	WEST CROOKTON	X		7.2		
	20100		427.7	EAST SELIGMAN	TX		1.9		
			429.6	WEST SELIGMAN	X(2)		M1 10.0 M2 10.2		
			439.6	AUDLEY	X(2)	2MT CTC	5.3		
			444.9	EAST PICA	X		1.9		
			446.8	WEST PICA	X	(1)	6.9		
	19950		453.7	YAMPAI	X(2)	(2) (1)	12.1		
			465.8	EAST PEACH SPRINGS	X	(4)	1.8		
			467.6	WEST PEACH SPRINGS	X		6.1		
			473.7	CHEROKEE	X(2)	(3)	10.3		
(2) 9,100			484.0	EAST VALENTINE	X	(4)	1.8		
			485.8	WEST VALENTINE	X	(3)	14.0		
	19915		499.8	WALAPAI	X(2)	(4)	9.6		
(1) 9,170			509.4	EAST BERRY	TX	(3) (4)	2.1		
			511.5	WEST BERRY	X	(3)	2.4		
	19905		513.9	GETZ	BCP		2.5		
	19900		516.4	KINGMAN		(3)	10.5		
(2) 9,169	19835		526.9	EAST GRIFFITH	X	(4)	1.9		
			528.8	WEST GRIFFITH	X	(3)	10.7		
			539.5	YUCCA	X(2)	(4)	12.2		
(2) 9,473			551.7	EAST FRANCONIA	X	(3)	1.8		
			553.5	WEST FRANCONIA	X	2MT CTC ATS	7.7		
	19805		561.2	TOPOCK	X(2)	(3)	13.5		
			574.7	EAST NEEDLES	X(2)	(4)	3.7		
	19800		578.4	NEEDLES	BCP X(2)	3MT CTC ATS	M1 293.9 M2 294.1		

(1)=DTB-ABS 9.14/9.15, (2)=2MT-CTC, (3)=DTB-ABS-ATS 9.14/9.15, (4)=2MT-CTC ATS

RADIO COMMUNICATION	Tone Call-In					
	CH	DS	MC	FS	Warm Bearing	Emer
East Winslow to West Seligman	55	1	4	3	5	9
West Seligman to East Needles	36	1	4	3	5	9
East Needles to Needles	55	2	4	3	5	9

Train Dispatcher Telephone Numbers

Chief Dispatcher—(817) 234-2334

Dispatcher—E. Winslow to W. Seligman

(DS 10)—(817) 234-2310

—W. Seligman to but not including E. Needles

(DS 11)—(817) 234-2311

—E. Needles to Needles (DS 12)—(909) 386-4212

1. Speed Regulations

1(A). Speed—Maximum

Passenger Freight

East Winslow to Needles (including trains 100 TOB and over)	79 MPH	55 MPH.
MP 284.5 to MP 326.7, EWD	90 MPH	55 MPH.
MP 362.1 to MP 418.3	90 MPH	55 MPH.
MP 446.8 to MP 578.0, against the current of traffic in DTB territory	79 MPH	55 MPH.
MP 484.0 to MP 514.0, Main 2	90 MPH	55 MPH.
MP 465.8 to MP 578.0, Main 1	90 MPH	55 MPH.

Unless otherwise restricted, the maximum speed for freight trains is 70 MPH provided:

- Train does not contain empty car(s). Refer to SSI 1(C) for determining speed for multiplatform, intermodal equipment.
- Train does not exceed 8,500 feet.
Exception: Trains operating with distributed power equipment with remote DP automatic brake valve cut in may operate at 70 MPH up to 10,000 feet in length.
- Train does not average more than 80 TOB.
Exception: Trains consisting entirely of intermodal equipment, autoracks (equipment designed to carry automobiles/trucks) or a combination or both may operate at 70 MPH with tons per operative brake as great as 90, and; Trains consisting entirely of double-stack equipment may operate at 70 MPH with tons per operative brake as great as 105.
- Engineer can control speed to 70 MPH without use of air brakes. (If unable to control speed to 70 MPH on long descending grades, two additional attempts are allowed to control speed with dynamic brake at slower speeds before speed must be reduced to 55 MPH while negotiating descending grade.)

Trains operating with solid double stack equipment only, may use a maximum of 32 axles of dynamic braking per engine consist.

1(B). Speed—Permanent Restrictions

MP 285.5 to MP 286.4, Main 1, 2 & 3	65 MPH	55 MPH.
MP 286.5 (HER)	20 MPH	20 MPH.
MP 286.4 to MP 287.4 * **	45 MPH	40 MPH.
MP 302.0 to MP 303.3	80 MPH.	
MP 327.0 to MP 328.6	75 MPH	65 MPH.
MP 328.6 to MP 330.8 * **	55 MPH	50 MPH.
MP 330.8 to MP 331.8 * **	40 MPH	35 MPH.
MP 331.8 to MP 335.7 * **	45 MPH	40 MPH.
MP 335.7 to MP 336.2 * **	40 MPH	35 MPH.
MP 336.2 to MP 338.0	60 MPH	55 MPH.
MP 338.0 to MP 342.2	55 MPH	55 MPH.
MP 342.2 to MP 343.5	55 MPH	50 MPH.
MP 343.5 to MP 345.2 * **	45 MPH	40 MPH.
MP 345.2 to MP 348.2	40 MPH	35 MPH.
MP 348.2 to MP 350.2	45 MPH	40 MPH.
MP 350.2 to MP 352.6 * **	50 MPH	45 MPH.
MP 352.6 to MP 353.9	70 MPH	65 MPH.
MP 362.5 to MP 364.1	80 MPH.	
MP 364.1 to MP 364.3 * **	45 MPH	45 MPH.
MP 364.3 to MP 366.8	55 MPH	45 MPH.
MP 366.8 to MP 367.9 * **	50 MPH	45 MPH.
MP 367.9 to MP 369.0 * **	55 MPH	50 MPH.

* Equipped with Westward ATS Inert Inductors

** Equipped with Eastward ATS Inert Inductors

	Passenger	Freight
MP 369.0 to MP 369.6	55 MPH	50 MPH
MP 369.6 to MP 371.0	60 MPH	50 MPH
MP 371.0 to MP 371.8 * **	60 MPH	50 MPH
MP 421.6 to MP 422.8 * **	50 MPH	45 MPH
MP 422.8 to MP 425.4 * **	55 MPH	50 MPH
MP 448.2 to MP 451.6	60 MPH	55 MPH
MP 451.6 to MP 453.2 *	50 MPH	45 MPH
MP 453.2 to MP 455.5	65 MPH	55 MPH
MP 455.5 to MP 457.7	50 MPH	45 MPH
MP 457.7 to MP 460.1, Main 1	55 MPH	50 MPH
MP 457.7 to MP 460.1X, Main 2	55 MPH	50 MPH
MP 460.1 to MP 463.7, Main 1	60 MPH	45 MPH
MP 460.1 to MP 463.8, Main 2	55 MPH	45 MPH
MP 463.8 to MP 464.9	50 MPH	45 MPH
MP 464.9 to MP 469.0, Main 1	70 MPH	45 MPH
MP 464.9 to MP 467.9, Main 2	65 MPH	45 MPH
MP 467.9 to MP 469.0, Main 2	60 MPH	45 MPH
MP 469.0 to MP 470.5, * **	50 MPH	45 MPH
MP 470.5 to MP 472.7, Main 1	75 MPH	
MP 470.5 to MP 472.6, Main 2	70 MPH	60 MPH
MP 472.7 to MP 477.0, Main 1	85 MPH	
MP 477.0 to MP 479.0	70 MPH	60 MPH
MP 479.0 to MP 480.6, Main 1, **	30 MPH	25 MPH
MP 479.0 to MP 479.3, Main 2	45 MPH	40 MPH
MP 479.3 to MP 480.6, Main 2, **	30 MPH	25 MPH
MP 480.6 to MP 481.6, Main 1	45 MPH	40 MPH
MP 480.6 to MP 481.6, Main 2, **	45 MPH	40 MPH
MP 481.6 to MP 482.5, Main 1	65 MPH	55 MPH
MP 481.6 to MP 482.5, Main 2, **	50 MPH	45 MPH
MP 482.5 to MP 486.8, Main 2	70 MPH	60 MPH
MP 482.5 to MP 490.2, Main 1	80 MPH	
MP 486.8 to MP 488.9, Main 2	70 MPH	65 MPH
MP 488.9 to MP 490.2, Main 2	80 MPH	
MP 514.1 to MP 515.3X, Main 2	75 MPH	60 MPH
MP 514.1 to MP 515.2, Main 1 *	60 MPH	55 MPH
MP 515.2 to MP 516.5, Main 1	45 MPH	40 MPH
MP 515.3X to MP 517.8X, Main 2	40 MPH	35 MPH
MP 517.8X to MP 519.9X, Main 2	35 MPH	30 MPH
MP 516.5 to MP 518.8, Main 1	40 MPH	35 MPH
MP 518.8 to MP 520.5, Main 1	70 MPH	60 MPH
MP 519.9X to MP 520.3, Main 2, **	30 MPH	30 MPH
MP 520.5 to MP 524.3, Main 1	80 MPH	
MP 520.3X to MP 524.0X, Main 2	60 MPH	55 MPH
MP 524.0X to MP 524.3X, Main 2	50 MPH	45 MPH
MP 524.3 to MP 525.7, Main 1	85 MPH	
MP 524.3X to MP 525.9X, Main 2, **	55 MPH	50 MPH
MP 525.9X to MP 526.9X, Main 2, **	79 MPH	65 MPH
MP 551.2 to MP 552.6, Main 2	70 MPH	60 MPH
MP 562.3 to MP 562.8, Main 1	65 MPH	60 MPH
MP 562.8 to MP 564.5, Main 1 *	55 MPH	50 MPH
MP 562.3 to MP 564.5, Main 2	55 MPH	50 MPH
MP 564.5 to MP 565.5	50 MPH	45 MPH
MP 565.5 to MP 565.9, Main 2 **	45 MPH	40 MPH
MP 565.9 to MP 574.6	55 MPH	55 MPH
MP 574.6 to MP 575.6, Main 2 and 3	55 MPH	55 MPH
MP 575.6 to MP 576.8, Main 2 and 3	80 MPH	55 MPH
MP 576.8 to MP 577.5, Main 2 and 3	55 MPH	55 MPH
MP 574.6 to MP 576.8, Main 1	50 MPH	50 MPH
MP 576.8 to MP 577.5, Main 1	50 MPH	45 MPH

1(C). Speed—Switches and Turnouts

Trains and engines using auxiliary tracks must not exceed turnout speed for that track unless otherwise indicated.

MP 286.7 Winslow, Yard Track No 1	20 MPH
MP 287.9 West Winslow, switch Main 1	50 MPH
MP 288.1 West Winslow, crossover	50 MPH
MP 288.3 West Winslow, west freight lead	20 MPH
MP 288.3 West Winslow, crossover	50 MPH
MP 300.4 Dennison, 2 crossovers	50 MPH
MP 310.5 East Canyon Diablo, crossover	50 MPH
MP 310.5 East Canyon Diablo, EE siding	20 MPH
MP 312.1 West Canyon Diablo, WE siding	20 MPH
MP 312.1 West Canyon Diablo, crossover	50 MPH
MP 326.7 East Darling, crossover	50 MPH
MP 329.5 West Darling, crossover	50 MPH
MP 340.8 East Flagstaff, 2 crossovers	50 MPH

* Equipped with Westward ATS Inert Inductors

** Equipped with Eastward ATS Inert Inductors

	Freight
MP 354.5 East Belmont, 2 crossovers	50 MPH
MP 362.1 Maine, 2 crossovers	50 MPH
MP 368.1 Chalender, 2 crossovers	50 MPH
MP 374.3 East Williams Jct., crossover	50 MPH
MP 374.3 East Williams Jct. EE siding	30 MPH
MP 375.0 West Williams Jct., WE siding	30 MPH
MP 375.0 West Williams Jct., crossover	50 MPH
West Williams Jct., Switch from Seligman Subdivision to Phoenix Subdivision	40 MPH
MP 383.1 East Perrin, crossover	50 MPH
MP 385.6 West Perrin, crossover	50 MPH
MP 392.0 East Doublea, crossover	50 MPH
MP 395.1 West Doublea, crossover	50 MPH
MP 405.5 East Eagle Nest, crossover	50 MPH
MP 407.5 West Eagle Nest, crossover	50 MPH
MP 418.3 East Crookton, crossover	50 MPH
MP 420.5 West Crookton, crossover	50 MPH
MP 427.7 East Seligman, crossover	50 MPH
East Seligman, EE yard track No. 1	30 MPH
West Seligman, WE yard track No. 1	30 MPH
MP 429.6 West Seligman, 2 crossovers	50 MPH
MP 439.6 Audley, 2 crossovers	50 MPH
MP 444.9, East Pica crossovers	50 MPH
MP 446.8, West Pica crossovers	50 MPH
MP 453.8 Yampai, 2 crossovers	50 MPH
MP 465.8, East Peach Springs EE North Siding	40 MPH
MP 465.8, East Peach Springs crossovers	50 MPH
MP 467.6, West Peach Springs crossovers	50 MPH
MP 473.7 Cherokee, 2 crossovers	50 MPH
MP 484.0, East Valentine, EE South Siding	40 MPH
MP 484.0, East Valentine, crossover	50 MPH
MP 485.8, West Valentine, crossover	50 MPH
MP 485.8, West Valentine, WE South Siding	40 MPH
MP 499.9, Walapai, 2 crossovers	50 MPH
MP 509.4, East Berry, EE North Siding	40 MPH
MP 509.4, East Berry crossover	50 MPH
MP 511.5, West Berry crossover	50 MPH
MP 511.5, West Berry, WE North Siding	40 MPH
MP 526.9, East Griffith EE south siding	40 MPH
MP 526.9, East Griffith crossover	50 MPH
MP 528.8, West Griffith crossover	50 MPH
MP 528.8, West Griffith WE south siding	40 MPH
MP 539.5 Yuuca, 2 crossovers	50 MPH
MP 551.8, East Franconia, EE South Siding	40 MPH
MP 551.8, East Franconia crossover	50 MPH
MP 553.5, West Franconia, crossover	50 MPH
MP 553.5, West Franconia WE south siding	40 MPH
MP 561.2 Topock, 2 crossovers	50 MPH
MP 574.5 East Needles, 2 crossovers	50 MPH
MP 574.6 East Needles, Main 1 to Main 1	50 MPH
MP 574.9 East Needles, Yard 1 to Main 1	40 MPH
MP 578.3 Needles, turnout, Main 1 to Yard 1	20 MPH
MP 578.4 Needles, 2 crossovers	40 MPH

1(D). Speed—Other

WWD freight trains with tonnage exceeding 400 tons per rated dynamic brake axle (Tons per Dyn Brake Axle = divide tonnage of train by the total rated operative dyn brake axles within the train, DP consists included if equipped):

MP 514.4 to MP 518.8, Main 1	25 MPH
MP 514.4 to MP 517.0, Main 2	25 MPH
MP 518.8 to MP 562.8	45 MPH

Temperature Restrictions—When the air temperature meets the threshold temperatures shown below, all trains must reduce speed to 40 MPH on main tracks through the limits shown unless a more restrictive speed is in effect.

Limits	Threshold Temperature
MP 287.4 to MP 305.7	100 Degrees
MP 314.8 to MP 487.1	100 Degrees
MP 496.5 to MP 500.0	100 Degrees
MP 514.6 to MP 516.4, Main 1	100 Degrees
MP 514.1X to MP 526.8X, Main 2	110 Degrees
MP 516.4 to MP 525.7, Main 1	110 Degrees
MP 527.2 to MP 565.6	110 Degrees

If in doubt as to the temperature, contact the train dispatcher. Notify the train dispatcher when your train is restricted to 40 MPH.

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions

Maximum Gross Weight of Car

- East Winslow to Needles..... 143 tons, Restriction A
- Six-axle locomotives are not allowed on the following tracks:
- Winslow, Duke City..... Track 2945
- Darling..... Upstairs
- Flagstaff..... ARCO Spur/Track 9249, Ralston
Purina Plant Tracks
- Seligman 4280, 4290 East & West Leg of Wye
- Nelson 4602, 4603, 4605, 4606, 4607
- Berry..... 5081, 5082
- McConnico 5212
- Needles 5782, 5784, 5785

3. Type of Operation

CTC—in effect:

- MP 284.5 to MP 446.8
- MP 427.9 to MP 429.6, Seligman, Yard Track 1
- MP 453.6 to MP 453.8
- MP 465.8 to MP 473.7
- MP 484.0 to MP 485.8
- MP 499.7 to MP 499.9
- MP 509.4 to MP 511.5
- MP 526.9 to MP 528.8
- MP 539.4 to MP 539.6
- MP 551.7 to MP 561.2
- MP 574.5 to MP 578.4

Multiple Main Tracks—in effect:

2 MT:

- MP 284.5 to MP 284.9
- MP 288.0 to MP 446.8
- MP 453.6 to MP 453.8
- MP 465.8 to MP 473.7
- MP 484.0 to MP 485.8
- MP 499.7 to MP 499.9
- MP 509.4 to MP 511.5
- MP 526.9 to MP 528.8
- MP 539.4 to MP 539.6
- MP 551.7 to MP 561.2
- MP 574.5 to MP 574.6

3 MT:

- MP 284.9 to MP 288.0
- MP 574.6 to MP 578.4

ABS—in effect:

- MP 446.8 to MP 453.6
- MP 453.8 to MP 465.8
- MP 473.7 to MP 484.0
- MP 485.8 to MP 499.7
- MP 499.9 to MP 509.4
- MP 511.5 to MP 526.9
- MP 528.8 to MP 539.4
- MP 539.6 to MP 551.7
- MP 561.2 to MP 574.5

Rule 6.24 Double Track Bi-Directional ABS (DTB) in Effect: (9.14/9.15 in effect)

- MP 446.8 to MP 453.6
- MP 453.8 to MP 465.8
- MP 473.7 to MP 484.0
- MP 485.8 to MP 499.7

- MP 499.9 to MP 509.4
- MP 511.5 to MP 526.9
- MP 528.8 to MP 539.4
- MP 539.6 to MP 551.7
- MP 561.2 to MP 574.5

Rule 6.25 Movement Against the Current of Traffic

Spring Switches are located as follows:

- Pica WE North Siding
- Yampai EE South Siding
- Nelson EE South Siding and WE North Siding
- Peach Springs EE South Siding
- TruxtonEE South Siding and WE North Siding
- McConnico WE North Siding
- Harris EE South Siding
- Topock EE South Siding and WE North Siding

4. General Code of Operating Rules Items

Rule 6.19—When flagging is required, distance will be 2 miles.

Rule 9.14—On tracks designated in the timetable, trains will run with or against the current of traffic, if the train dispatcher gives verbal authorization or a controlled signal indicates proceed.

Rule 9.14.1—This rule applies to trains moving both with and against the current of traffic.

Rule 9.17—is changed as follows:

Item A(7) does not apply where double track bi-directional ABS (DTB) is in effect. A train authorized to move against the current of traffic in DTB territory is not relieved from waiting 5 minutes after opening main track switch.

In DTB territory, when a train authorized by controlled signal indication or verbal authority other than track permit or track warrant clears the main track, authority must be obtained from the control operator before entering or reentering the main track.

Rule 12.1—ATS is in effect on both main tracks between Maine and East Crookton, Main 1 WWD between Peach Springs and Needles, Main 2 EWD between Getz and MP 484.0, and on both main tracks EWD between East Darling and East Winslow.

Glossary—the following glossary term is added:

DTB—Double Track Bi-Directional—A 2 main track automatic block signal system designated as double track and signalled for movement in both directions on both tracks.

5. Trackside Warning Detectors (TWD)

- A. Protecting bridges, tunnels or other structures
 - MP 306.9—WWD—Recall Code 7
Protects Canyon Diablo and Canyon Padre bridges, MP 312.1 to MP 312.2 and MP 317.7 to MP 317.8
 - MP 322.7—EWD—Recall Code 2
Protects Canyon Padre and Canyon Diablo Bridges, MP 317.8 to MP 317.7 and MP 312.2 to MP 312.1
 - MP 452.1—WWD—Recall Code 8
Protects Nelson Tunnel, MP 457.5 to MP 457.6
 - MP 473.9—EWD—Recall Code 7
Protects Nelson Tunnel, MP 457.6 to MP 457.5
 - MP 561.5—WWD—Recall Code 7
Protects Colorado River bridge, MP 565.8 to MP 565.9
 - MP 571.2—EWD—Recall Code 8
Protects Colorado River bridge, MP 565.9 to MP 565.8
- B. Other TWD locations
 - MP 292.9—DED, Exception Reporting
 - MP 306.9—EWD—Recall Code 7
 - MP 322.7—WWD—Recall Code 2
 - MP 326.7—DED, Exception Reporting
 - MP 331.9—DED, Exception Reporting
 - MP 336.8—DED, Exception Reporting—Recall Code 8
 - MP 341.3—DED, Exception Reporting
 - MP 344.7—DED, Exception Reporting

- MP 350.9—Exception Reporting—Recall Code 2
- MP 355.8—DED, Exception Reporting
- MP 359.6—DED, Exception Reporting
- MP 364.7—Exception Reporting—Recall Code 7
- MP 370.1—DED, Exception Reporting
- MP 373.7—DED, Exception Reporting
- MP 377.6—Exception Reporting—Recall Code 8
- MP 401.2—Exception Reporting—Recall Code 8
- MP 413.6—Exception Reporting—Recall Code 2
- MP 419.1—DED, Exception Reporting
- MP 426.9—Exception Reporting—Recall Code 8
- MP 439.8—Exception Reporting—Recall Code 7
- MP 447.0—DED, Exception Reporting
- MP 452.1—EWD—Recall Code 8
- MP 456.4—DED, Exception Reporting
- MP 463.5—DED, Exception Reporting
- MP 466.9—DED, Exception Reporting
- MP 473.9—WWD—Recall Code 7
- MP 480.7—DED—Recall Code 0
- MP 485.1—DED, Exception Reporting
- MP 493.3—Exception Reporting—Recall Code 7
- MP 512.5—Exception Reporting—Recall Code 8
- MP 516.6—DED, Exception Reporting
- MP 521.1, Main 1—DED, Exception Reporting
- MP 521.4X, Main 2—DED, Exception Reporting
- MP 526.8—DED, Exception Reporting
- MP 536.0—Exception Reporting—Recall Code 8
- MP 546.8—Exception Reporting—Recall Code 7
- MP 561.5—EWD—Recall Code 7
- MP 571.2—WWD—Recall Code 8

C. Other Detectors

- MP 290.5—High Water
 - WWD controlled signals West Winslow
 - Signals 2902-2904
- MP 379.4-379.8—Rock Slide
 - Signals 3802-3804 and 3771-3773
 - (Signals will display flashing red when rock slide detector is activated).
- MP 395.5—Rock Slide
 - WWD controlled signals West Doublea
 - and signals 3972 and 3974.
- MP 402.0—Rock Slide
 - Warning lights MP 401.1 and 402.7.
 - Signals 4011-4013 and 4022-4024.
- MP 409-411—Rock Slide
 - Signals 4091-4093 and 4112-4114.
 - (Signals will display flashing red when rock slide detector is activated).
- MP 439.0—High Water
 - EWD controlled signals Audley and
 - Signals 4361-4363
- MP 467.7—High Water—WWD and EWD controlled signals West Peach Springs
- MP 505.9—High Water—Signals 5051, 5053 and 5072, 5074
- MP 552.2—High Water
 - WWD controlled signals, E. Franconia
 - EWD controlled signal W. Franconia
- MP 554.8—High Water
 - WWD controlled signals W. Franconia and
 - Signals 5562 and 5564
- MP 562.8—High Water
 - WWD controlled signals Topock and
 - Signals 5632-5634
- MP 575.8—High Water
 - WWD controlled signals E Needles MP 574.5
 - EWD intermediate signals 5764, 5766, 5762, and 5768

6. FRA Excepted Track—None

7. Special Conditions

Stop to Cool Wheels—Westward freight trains must stop at least ten minutes between MP 536 and MP 544 to cool the wheels when train weight exceeds 400 tons per axle of operative dynamic brake.

Close Clearances—Do not ride the side of equipment at the following locations due to close clearance:

Flagstaff	MP 342.9	Track 9226	Dock/Fence
	MP 344.2	Track 9259	Dock/Fence
	MP 344.2	Track 9260	Dock/Fence
Winslow	MP 286.6	Track 2839	Dock/Fence
	MP 285.7	Track 2931	Dock/Fence
	MP 285.4	Track 2946	Dock/Fence

Close Track Centers—Do not ride the side of equipment on the following tracks unless the adjacent track is known to be clear:

Winslow	MP 286.6	MT2	2812-2814
Pica	MP 446.9	MT1	4460-4461
Nelson	MP 459.1	MT1	4601-4602

Time Zone Change at MP 578.4—The time changes from Mountain to Pacific for WWD trains and from Pacific to Mountain for EWD trains at MP 578.4.

Overlap Circuit Instructions—Because of their proximity to the CTC control points, overlap circuits and signs will be installed on the spring switch end of the following sidings:

East End of:	West End of:
South Siding Berry	South Siding Truxton
Siding Harris	North Siding Truxton
Siding Athos	

The signal at the WE of North Siding Griffith will not have an overlap circuit or a sign because it is so close to East Griffith that it is direct wired to the CTC circuit and will not clear until the CTC signal is cleared. With these overlap circuits and signs installed, when operating on a siding, it will be necessary to stop short of the overlap sign until authorized to leave the siding unless otherwise instructed by the train dispatcher. The Peach Springs WE North Siding hand throw switch is equipped with an electric lock.

Short Mile Locations—

MP 332.0 to MP 330.0	4464 feet
MP 333.0 to MP 334.0	4640 feet
MP 348.0 to MP 349.0	4736 feet

HLCS—Hy-Rail Limits Compliance System (HLCS) is in effect on the Seligman Subdivision.

Flash Flood Warnings—The following locations have been identified as “critical areas” subject to flash floods and washouts as outlined in System Special Instructions, Item 33:

- MP 394.8 to MP 396.8
- MP 507.3 to MP 508.5

8. Line Segments

Yard Line Segments

Line Segment	Yard
7251	Winslow Yard


Road Line Segments



Line Segment	Limits
7200	East Winslow to East Needles

9. Locations Not Shown as Stations

Name	Mile Post Location	Capacity Feet	Switch Opens
Dennison (Main 2)	298.3	200	West
Dennison (Main 1)	298.3	1250	West
Sunshine (Main 2)	305.9	3,617	Both
Angell (Main 1)	322.7	Wye	Both
Angell (Main 2)	322.7	330	West
Darling	328.6	Yard	Both
Cosnino (Main 1)	333.1	430	East
Cosnino (Main 2)	333.3	1,044	East
McPhetridge (Main 1)	339.9	4,735	Both
Ralston Purina (Main 2)	340.2	Yard	Both
Belmont (Main 2)	355.9	490	Both
Belmont (Main 2)	356.3	4,984	Both
Belmont (Main 1)	356.3	412	East
Maine (Main 1)	362.5	2,272	Both
Chalender (Main 2)	368.1	293	East
West Perrin (Main 1)	385.4	560	Both
West Doublea (Main 2)	395.0	650	Both
West Eagle Nest (Main 1)	407.2	562	Both
Crookton (Main 1)	419.0	1,877	Both
Audley (Main 2)	438.8	1,000	East
Pica (Main 1)	445.9	4,300	Both
Pica (Main 2)	447.1	150	East
Yampai (Main 1)	452.2	6,784	Both
Yampai (Main 2)	452.2	5,329	Both
Nelson (Main 1)	460.2	4,647	Both
Nelson (Main 2)	460.2	5,783	Both
Shipleigh (Main 1)	461.4	400	West
Peach Springs (Main 1)	465.8	5,714	Both
Peach Springs (Main 2)	465.6	5,277	West
Truxton (Main 1)	477.3	5,423	Both
Truxton (Main 2)	477.3	5,557	Both
Hackberry (Main 1)	489.0	4,934	West
Hackberry (Main 2)	489.8	1,788	East
Walapai (Main 1)	501.3	5,550	Both
Walapai (Main 2)	501.3	5,939	Both
Berry (N Siding)	510.0	970	Both
Berry (Main 2)	511.5	7,132	Both
McConnico (Main 1)	521.2	3,350	Both
Harris (Main 2)	521.5X	7,117	Both
Griffith (Main 1)	526.7	5,198	Both
Athos (Main 2)	535.6	7,100	Both
Yucca (Main 1)	540.2	7,115	Both
Yucca (Main 2)	540.2	5,160	Both
Powell (Main 2)	558.8	663	East
Powell (Main 1)	558.8	620	East
Topock (Main 1)	565.1	5,357	Both
Topock (Main 2)	565.1	5,491	Both

10. Grade Chart

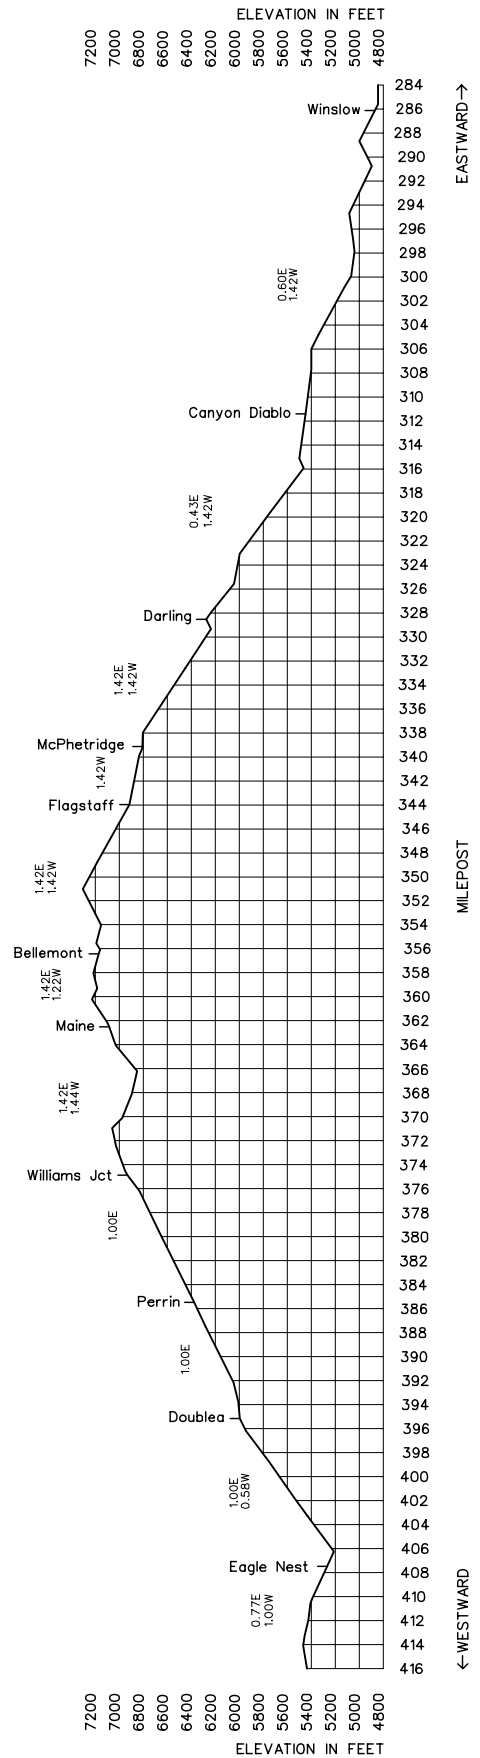

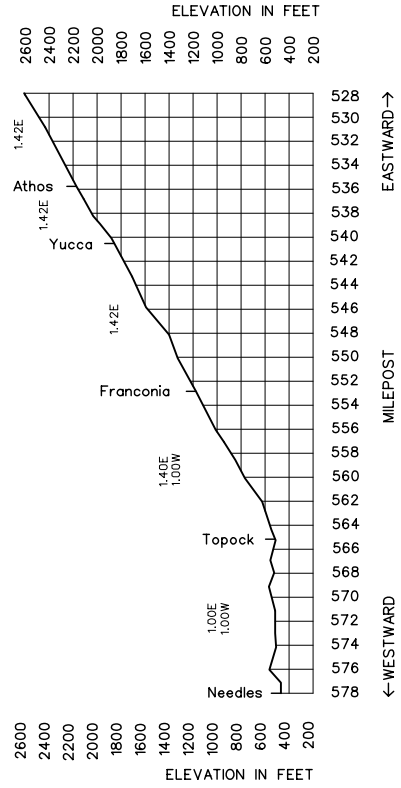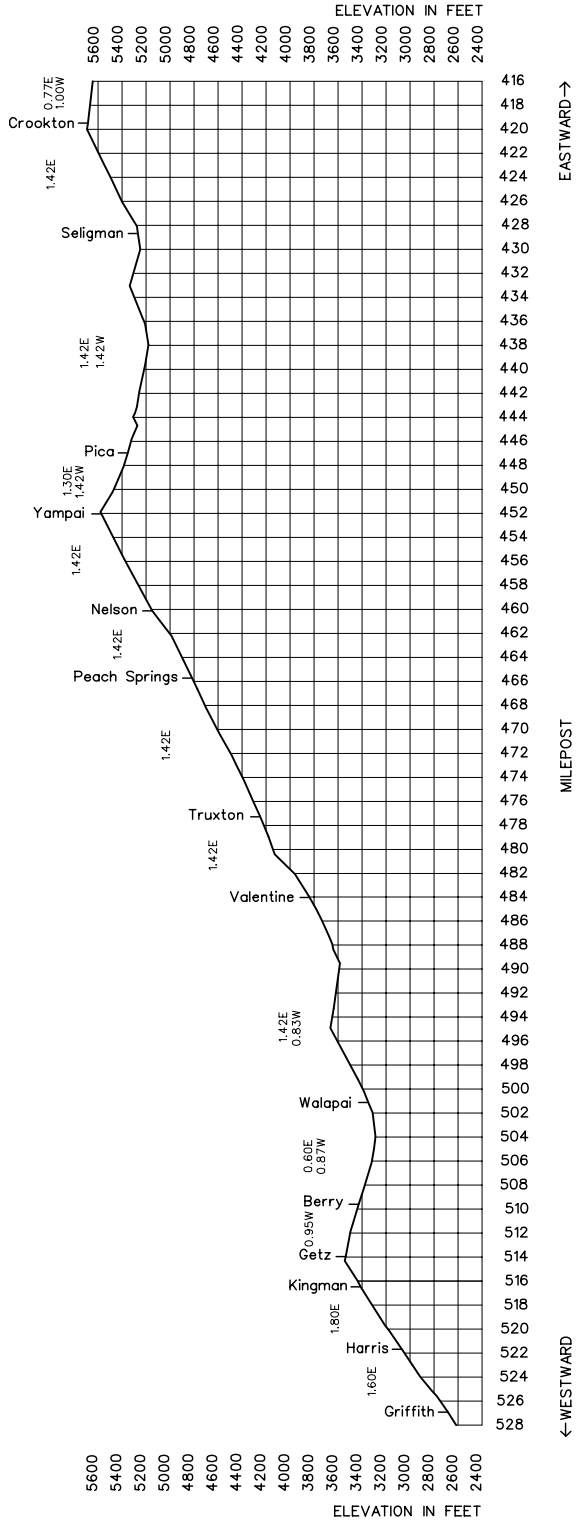

WESTWARD ↓	Length of Siding (Feet)	Station Nos.	Mile Post	Springerville Subdivision MAIN LINE STATIONS		Type of Oper.	Line Segment	Miles to Next Stn.	EASTWARD ↑
				Rule 4.3					
			0.0	TEPCO JCT.	A	TWC	7205	29.7	
		20560	29.7	SPRINGERVILLE	R			29.7	

Tone Call-In						
RADIO COMMUNICATION	CH	DS	MC	FS	Warm Bearing	Emer
Tepco Jct. to Springerville	72	1	4	3	5	9

Train Dispatcher Telephone Numbers
Chief Dispatcher—(817) 234-2334
Dispatcher (DS 09)—(817) 234-2309

1. Speed Regulations

1(A). Speed—Maximum

Freight

MP 0.0 to MP 26.1, including trains 100 TOB and over 49 MPH.
 MP 26.7 to MP 29.7 15 MPH.

1(B). Speed—Permanent Restrictions—None

1(C). Speed—Switches and Turnouts

Trains and engines using auxiliary tracks must not exceed turnout speed for that track unless otherwise indicated.
 Tepco Jct., MP 0.0, dual control switch turnout to Coronado Subdivision 40 MPH.
 Springerville, spring switch Tepco Loop Track 10 MPH.

1(D). Speed—Other

Locomotive cranes/pile drivers, AT-199454 through AT-199468 and Jordan spreaders 30 MPH.
 Speed limit on Tepco Loop Track 15 MPH.

See Item 1 of the System Special Instructions for additional speed restrictions.

2. Bridge and Equipment Weight Restrictions
Maximum Gross Weight of Car

Tepco Jct to Springerville 143 tons, Restriction A

3. Type of Operation

TWC—in effect:
 MP 0.0 to MP 29.7

Restricted Limits—in effect:
 Springerville—MP 25.0 to MP 29.7

4. General Code of Operating Rules Items

Rule 6.19—When flagging is required, distance will be 1.5 miles.

5. Trackside Warning Detectors (TWD)—None

6. FRA Excepted Track—None

7. Special Conditions

Tepco Jct.—Be governed by superintendents notice for operation of dual control switch and circuit controller box.

Springerville Subdivision—Loop track designated Track 2161 in service at MP 26.1 with east switch connection. Loop track is 3.9 miles in length and equipped with spring switch and switch point indicator.

Speed limit on loop track 15 MPH, except speed limit through rotary dumper 4 MPH. Unit coal trains will operate clockwise around loop track for unloading. Window awnings and mirrors must be positioned against car body on all engines before entering dumper.

Close Clearances—Do not ride the side of equipment at the following locations due to close clearance:

- MP 26.8 Dumper
- Springerville Cabooses will not be operated through dumper account insufficient clearance at Springerville.

Flash Flood Warnings—The following locations have been identified as “critical areas” subject to flash floods and washouts as outlined in System Special Instructions, Item 33:

None

8. Line Segments


Road Line Segments

Line Segment Limits Mile Posts
 7205 Tepco Jct. to Springerville MP 0.0 to MP 29.7

9. Locations Not Shown as Stations

Name	Mile Post Location	Capacity Feet	Switch Opens
Carrizo Storage	1.8	653	Both
Tucson Electric Power Co.	26.1	3,700	East

10. Grade Chart

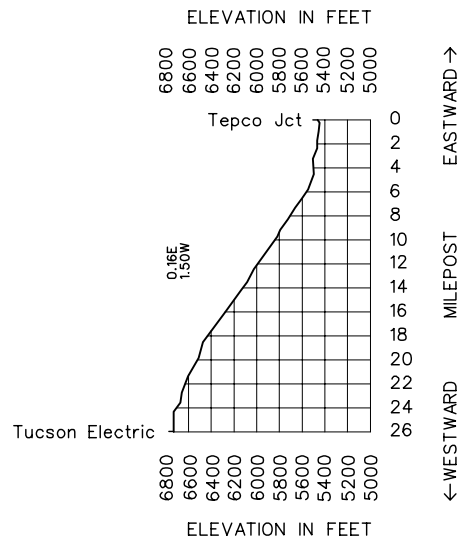

Speed Tables

SPEED TABLE									
Time Per Mile		Miles Per Hour	Time Per Mile			Miles Per Hour	Time Per Mile		Miles Per Hour
Min.	Sec.		Min.	Sec.	Min.		Sec.		
-	36	100	-	58	62.1	1	40	36.0	
-	37	97.3	-	59	61.0	1	42	35.3	
-	38	94.7	1	-	60.0	1	44	34.6	
-	39	92.3	1	02	58.0	1	46	34.0	
-	40	90.0	1	04	56.2	1	48	33.3	
-	41	87.8	1	06	54.5	1	50	32.7	
-	42	85.7	1	08	52.9	1	52	32.1	
-	43	83.7	1	10	51.4	1	54	31.6	
-	44	81.8	1	12	50.0	1	56	31.0	
-	45	80.0	1	14	48.6	1	58	30.5	
-	46	78.3	1	16	47.4	2	-	30.0	
-	47	76.6	1	18	46.1	2	05	28.8	
-	48	75.0	1	20	45.0	2	10	27.7	
-	49	73.5	1	22	43.9	2	15	26.7	
-	50	72.0	1	24	42.9	2	30	24.0	
-	51	70.6	1	26	41.9	2	45	21.8	
-	52	69.2	1	28	40.9	3	-	20.0	
-	53	67.9	1	30	40.0	3	30	17.1	
-	54	66.6	1	32	39.1	4	-	15.0	
-	55	65.5	1	34	38.3	5	-	12.0	
-	56	64.2	1	36	37.5	6	-	10.0	
-	57	63.2	1	38	36.8	12	-	5.0	

FEET	TENTHS OF A MILE
528	.1
1,056	.2
1,584	.3
2,112	.4
2,640	.5
3,168	.6
3,696	.7
4,224	.8
4,752	.9

TERMSDXO

- T - Trains
- E - Engines
- R - Railroad cars
- M - Men & equipment fouling track
- S - Stop signal
- D - Derail or switch lined improperly
- X - Crossings at grade
- O - Other crew movements

Remember “TERMSDXO” when shoving cars

To assist in determining where to start sounding the whistle as described in Whistle Signal 7, use the following:

At the speed indicated in the left column, wait the time indicated in the right column before sounding the whistle.

Train Speed	Delay to Sound Whistle
40 MPH	3 seconds
35 MPH	6 seconds
30 MPH	10 seconds
25 MPH	16 seconds
20 MPH	25 seconds
15 MPH	40 seconds
10 MPH	1 minute 10 seconds